HighWire HW400c/2

User Reference Guide

M8275, Rev 0.5

Copyright 2006, SBE, Inc.

Copyright ©2006 by SBE, Inc. All rights reserved.
No part of this manual may be reproduced by any means without written permission from SBE, Inc., except that the purchaser may copy necessary portions for internal use only.

While every effort has been made to ensure the accuracy of this manual, SBE cannot be held responsible for damage resulting from information herein. All specifications are subject to change without notice.

SBE, Inc. and the SBE logo are trademarks of SBE, Inc.

All other trademarks and copyrights are owned by their respective companies.

About SBE, Inc. SBE designs and provides IP-based networking solutions for an extensive range of applied computing applications. SBE delivers a portfolio of scalable, standards-based hardware and software products, including iSCSI and VoIP, designed to enable optimal performance and rapid deployment across a wide range of next generation communications and storage systems.

SBE is based in San Ramon, California, and can be reached at 925-355-2000 or online at http://www.sbei.com.

Revision History

Revision	Date	Changes
1.0	October 10, 2006	Initial Release

 Copyright 2006, SBE, Inc.

THIS PAGE IS INTENTIONALLY LEFT BLANK

 Copyright 2006, SBE, Inc.

Table of Contents

Revision History iii
Table of Contents v
List of Figures ix
List of Tables ix
Conventions xii

1 About This Manual 1

2 Introduction 2

2.1 Product Description 2
2.2 Unpacking Instructions 3
2.3 Handling Procedures 4
2.4 Hardware Installation of the HW400c/2 4
2.5 Returns/Service 5
2.6 Operating Environment 5
2.7 Mean Time Between Failures (MTBF) 6
2.8 Regulatory Agency Certifications 7
2.8.1 Safety 7
2.8.2 US and Canadian Emissions 7
2.8.3 European Emissions and Immunity 7
2.9 Agency Compliance 7
2.10 Physical Properties 8
2.10.1 HW400c/2 Front Panel 9
2.10.2 Part number and serial number 10
2.10.3 Bus Keying 10
2.10.3.1 Compact PCI 10
2.10.3.2 PTMC Site 10
2.10.4 Power Requirements 11
2.10.5 Switches 12
2.10.6 Product Configurations 12

3 Functional Blocks 13

3.1 PowerPC Processor 13
3.1.1 MPC744X Development/Debug Support 13
3.1.2 Console port 14
3.1.3 Pushbutton Reset / Interrupt 14
3.1.4 COP/JTAG Port 16
3.1.5 Special Purpose Jumper Block 16
3.1.5.1 Jumper Pins 17

 Copyright 2006, SBE, Inc.

3.2 MV64462 System Controller 17
3.2.1 System Bus 17
3.2.2 Dual Data Rate (DDR) SDRAM 17
3.2.3 Host PCI Bus 18
3.2.3.1 Operation Without CompactPCI Bus 18
3.2.4 Local PCI Bus 18
3.2.5 Serial EEPROM 19
3.2.6 MV64462 Ethernet Interface 22
3.2.7 MV64462 Device Interface 22
3.2.7.1 SRAM Device 22
3.2.7.2 Boot PROM 22
3.2.7.3 Disk-on-Chip 22
3.2.7.4 CT Bus Controller 23
3.2.7.5 CPLD 23
3.2.8 Watchdog Timer 23
3.2.9 Reset 23
3.2.10 Multi-Purpose Port (MPP) Usage 24
3.3 Computer Telephony Bus Controller 25
3.3.1 H.110 Interface (T8110L) 25
3.3.2 T8110L Clocking Interface (T8110L) 25
3.3.3 Operation in Non-H.110 Backplane 27
3.4 Layer 2 Ethernet Switch 27
3.4.1 Switch Registers Initialization and Monitoring 28
3.4.2 MV64462 System Controller Ethernet Interface 28
3.4.3 Front Panel (RJ-45) Ethernet Interface 28
3.4.4 PT5MC Ethernet Ports 29
3.4.5 CompactPCI Packet Switch Backplane (cPSB) Ports 29
3.4.5.1 CompactPCI Connector J3, power and ground 29
3.4.6 On-board Ethernet Indicator LEDs 30
3.5 Mezzanine Card Sites 32
3.5.1 PT5MC Type Mezzanine Cards 32
3.5.2 PT2MC Type Mezzanine Cards 32
3.5.3 PMC Type Mezzanine Cards 32
3.5.4 Mezzanine Card Power 33
3.5.5 PTMC/PMC Connector Summary 33
3.5.6 PTMC Jn1 and Jn2 PCI Connectors 34
3.5.7 PTMC Jn3 CT Bus Connector 35
3.5.8 PTMC Jn4 LAN/User I/O Connector 36
3.5.8.1 PTMC Site A Jn4 36
3.5.8.2 PTMC Site B Pn4 38
3.5.9 PTMC Site Voltage Keying 39
3.6 IPMI System Management 39
3.6.1 IPMI Controller 39
3.6.2 Temperature and Voltage Monitor 40
3.6.3 Hot Swap Ejector Latch Detection 41
3.6.4 Blue (Hot Swap) LED Control 41
3.6.5 Boot Status Monitor 41
3.6.6 Board Reset via IPMI 42

 Copyright 2006, SBE, Inc.

3.6.7 IPMI System Power Supply 42
3.6.8 IPMI Firmware EEPROMs 42
3.6.9 Zircon PM Reset 43
3.6.10 IMPI Get Device ID 43
3.7 Hot Swap Support 44
3.7.1 Hot Swap on J1 and J2 44
3.7.2 Hot Swap on J3 44
3.7.3 Hot Swap on J4 44
3.7.4 Hot Swap on J5 44
3.7.5 Hot Swap Sequence 45
4 Programming Information 46
4.1 HW400c/2 Memory Map 46
4.2 CPLD Registers 47
4.2.1 Clock Select Register (CSR) 48
4.2.2 Board Status Register (BSR) 49
4.2.3 LED Register A (LEDA) 49
4.2.4 Memory Option Register (MOR) 50
4.2.5 Geographic Addressing Register (GAR) 50
4.2.6 PTMC Reset Register (PRR) 51
4.2.7 PTMC Control Register (PCR) 51
4.2.8 Board Option Register (BOR) 52
4.2.9 General Purpose Register (GPR) 52
4.2.10 PCI Status Register (PSR) 53
4.2.11 Extended Type Register (ETR) 53
4.2.12 Hardware Revision Register (HRR) 54
4.2.13 PLL Configuration Register A (PLLA) 54
4.2.14 PLL Configuration Register B (PLLB) 55
4.2.15 LED Register B (LEDB) 56
4.2.16 Device Control Register (DCR) 57
4.2.17 CPU Timer Register (CTR) 57
4.2.18 Warm Reset Register (WRR) 58
4.2.19 SPI Page Register (SPR) 58
4.2.20 SPI Address Register (SAR) 58
4.2.21 SPI Read Byte Offset Register (SOR) 59
4.2.22 Read Byte Count Register (RBC) 59
4.2.23 Write Byte Count Register (WBC) 60
4.2.24 SPI Data Registers (SDR0 – SDR7) 60
4.2.25 SPI Error and Status Register (SESR) 61
4.2.26 EEPROM Address Register (EAR) 61
4.2.27 EEPROM Operation/Status Register (EOSR) 62
4.2.28 EEPROM Data Registers (EDR0 – EDR1) 63
4.3 Accessing the Serial EEPROM 63
4.3.1 Reading an EEPROM Address 63
4.3.2 Writing an EEPROM Address 64
4.4 Accessing the SPI Interface 64
4.4.1 Registers in the CPLD 64
4.4.2 BCM5388 Registers Access Rules 64

4.4.3 Reading BCM5388 Register 65
4.4.4 Writing a BCM5388 Register 65
5 Linux on the HW400c/2 and Host system 67
5.1 Host Hardware and Software Requirements 67
5.2 Network and System Configuration 68
5.3 Installing Linux on your host system 68
5.4 Configuring the Host System 69
5.4.1 Modifying the Host Path 69
5.4.2 Configuring the Host NFS Server 69
5.4.3 Configuring Host tftp services 70
5.4.4 Configuring tftp with inetd 71
5.4.5 Configuring tftp with xinetd 73
5.4.6 Configuring a bootp Server 74
5.5 Booting the HW400c/2 75
5.5.1 U-boot, Universal Bootloader 76
5.5.1.1 U-boot commands 76
5.5.1.2 U-boot environment variables 77
5.5.1.3 Power up call trace 79
5.5.2 Booting with tftp 80
5.5.2.1 U-boot parameters for tftp with bootp 80
5.5.2.2 U-boot parameters for tftp with static IP address 81
5.5.2.3 Boot console 81
5.5.3 Booting with Disk on Chip 84
5.5.3.1 Loading the Disk on Chip 84
5.5.3.2 Creating a uRamdisk Image 85
5.5.3.3 Booting from DoC 85
5.6 Compiling the Kernel (*uImage*) 86
5.6.1 Gentoo Application Packages Management 87
5.6.1.1 Emerge 87
5.6.1.2 Enable remote login with `ssh` 88
5.6.1.3 Starting network services; `xinetd` 88
5.6.1.4 Starting `ftp` services; `vsftpd` 88
5.7 Linux Device Drivers 89
Appendix A IPMI GetDeviceID 90
Appendix B U-Boot Environment variables 91

List of Figures

Figure 1. HW400c/2 Block Diagram 3
Figure 2. The HW400c/2 PTMC Processing Platform 8
Figure 3. HW400c/2 Front Panel 9
Figure 4. Console port pin out 14
Figure 5. J8, J9 Reset/NMI header 14
Figure 6. J8 and J9 with optional Reset/NMI cable 15
Figure 7. Optional Reset/NMI switch 16
Figure 8. COP/JTAG Pinout 16
Figure 9. J7 Special purpose jumper block 16
Figure 10. Local CT Bus Clocking Block Diagram 26
Figure 11. Local CT Bus Clock Generation 26
Figure 12. Front panel Ethernet RJ-45 LEDs 28
Figure 13. IPMI Block Diagram 40
Figure 14. HW400c/2 Network and System environment 67

List of Tables

Table 1. HW400c/2 Operating Environment 5
Table 2. HW400c/2 Physical Dimensions 8
Table 3. HW400c/2 power requirements VIO = 5.0V 11
Table 4. HW400c/2 power requirements VIO = 3.3V 11
Table 5. HW400c/2 Order time options 12
Table 6. HW400c/2 Processor Options 13
Table 7. J8 and J9 pin out 15
Table 8. J7 pin functions 17
Table 9. Microwire EEPROM Contents, Factory Area 20
Table 10. Microwire EEPROM Contents, Uboot Area 21
Table 11. MV64462 Multi-Purpose Port Assignments 24
Table 12. LSC Assignments 25
Table 13. LREF [3:2] Assignments 27

 Copyright 2006, SBE, Inc.

Table 14. Layer 2 Switch Port Assignments 27
Table 15. Compact PCI connector J3 pin out 30
Table 16. Mezzanine Card Power Budget 33
Table 17. PTMC/PMC Connector Summary 33
Table 18. PTMC Jn1 and Jn2 Connector Pin Assignments 34
Table 19. PTMC Configuration #2/#5 Pn3 Connector Pin Assignment 35
Table 20. PTMC Site A Configuration #2/#5 Pn4 Connector Pin Assignment 37
Table 21. PTMC Site B Configuration #2/#5 Pn4 Connector Pin Assignment 38
Table 22. GPIO Port Assignments for IPMI 40
Table 23. Voltage Monitor A/D Port Assignments for IPMI 41
Table 24. HW400c/2 Temperature Sensor Locations 41
Table 25. Firmware EEPROM Addresses 42
Table 26. Product ID number 43
Table 27. Overview of Hot Swap Insertion/Extraction Sequences 45
Table 28. HW400c/2 Memory Map 46
Table 29. CPLD Registers 47
Table 30. Clock Select Register (CSR) Offset Address 0x04 48
Table 31. Board Select Register (BSR) Offset Address 0x05 49
Table 32. LED Register A (LEDA) Offset Address 0x06 49
Table 33. Memory Option Register (MOR) Offset Address 0x07 50
Table 34. Geographic Addressing Register (CSR) Offset Address 0x08 50
Table 35. PTMC Reset Register (PRR) Offset Address 0x09 51
Table 36. PTMC Control Register (PCR) Offset Address 0x0A 51
Table 37. Board Option Register (BOR) Offset Address 0x0D 52
Table 38. General Purpose Register (GPR) Offset Address 0x0E 52
Table 39. PCI Status Register (PSR) Offset Address 0x0F 53
Table 40. Extended Type Register (ETR) Offset Address 0x10 53
Table 41. Hardware Revision Register (HRR) Offset Address 54
Table 42. PLL Configuration Register A (PLLA) Offset Address 0x12 54
Table 43. PLL Configuration Register B (PLLB) Offset Address 0x13 55
Table 44. LED Register B (LEDB) Offset Address 0x14 56
Table 45. On-board LED functions as determined by LEDB [1:0] 56
Table 46. Device Control Register (CSR) Offset Address 0x15 57
Table 47. CPU Timer Register (CTR) Offset Address 0x16 57

Table 48. Warm Reset Register (WRR) Offset address 0x17 58
Table 49. SPI Page Register (SPR) Offset Address 0x1A 58
Table 50. SPI Address Register (SAR) Offset Address 0x1B 58
Table 51. SPI Read Byte Offset Select Register (SOR) Offset Address 0x1C 59
Table 52. Read Byte Count Register (RBC) Offset Address 0x1D 59
Table 53. Write Byte Count Register (WBC) Offset Address 0x1E 60
Table 54. SPI Data Registers (SDRn) Offset Address 0x20-0x27 60
Table 55. SPI Error and Status Register (SESR) Offset Address 0x1F 61
Table 56. EEPROM Address Register (EAR) Offset Address 0x28 61
Table 57. EEPROM Operation/Status Register (EOSR) Offset Address 0x29 62
Table 58. EEPROM Data Registers (EDRn) Offset Address 0x2A-0x2B 63

 Copyright 2006, SBE, Inc.

Conventions

The following conventions are used in this document:

A # following a signal name, e.g., INTA#, represents an active low signal.

A / preceding a signal name, e.g., /INTA represents an active low signal.

0x preceding a number represents a Hexadecimal value.

A number in “ ” preceded by H represents a Hexadecimal value.

A number in “ ” preceded by B represents a Binary value.

A register or bit name that ends with _EN indicates an enable function

A register or bit name that ends with _N indicates an asserted low function

Typeface `courier` is used to designate code and/or terminal input.

Draws attention to important information related to the nearby text.

Refers to information about potential hazards to equipment or personnel.

Copyright 2006, SBE, Inc.

1 ABOUT THIS MANUAL

This manual is technical reference for the HighWire HW400c/2 Gigabit Switched PTMC Processing Platform for CompactPCI. This manual is intended for those who are installing the HW400c/2 into a system.

The *HighWire HW400c/2 User Reference Manual* includes the following:

- Introduction and background on the HighWire HW400c/2
- Hardware reference material
- Hardware installation instructions
- Programming information
- Physical characteristics and specifications
- Operating System Software environment and installation

 Copyright 2006, SBE, Inc.

2 INTRODUCTION

The HW400c/2 is a flexible high-performance core processing platform for building powerful processor enabled CompactPCI (CPCI) telephony and data communications I/O solutions. Advanced features on the HW400c/2 include two PCI Telecom Mezzanine Card (PTMC) sites for CT Bus enabled I/O interfaces that are interconnected through a high-speed Layer 2 Gigabit Ethernet switch to the dual node CompactPCI Packet Switched Backplane (cPSB). The HighWire core architecture utilizes the Freescale MPC7447A PowerPC processor and Marvell Discovery™ III system controller to provide a powerful computing environment for addressing a wide range of communications applications.

The HW400c/2 is optimized for packet-based switch fabric system architectures and is fully compliant with the PICMG 2.16 cPSB specification. The cPSB standard provides a switched fabric backplane interconnection using Ethernet technology overlaid on the standard CPCI J3 connector. Dual Gigabit Ethernet interfaces are provided on the HW400c/2 cPSB interface to support both the high availability dual node and reduced cost single node configurations.

Full CPCI compliance and interoperability are maintained including Hot Swap, H.110 CT Bus and rear I/O support.

2.1 Product Description

The HW400c/2 is built on SBE's advanced HighWire core architecture, and features the MPC7447A PowerPC processor, Marvell Discovery III system controller, up to 1GB DDR SDRAM and Disk-on-Chip flash file system storage to meet the demanding needs of today's telecom and datacom applications. Additional developer features including a serial console port and a COP emulator port help speed code development. The HW400c/2 also fully supports the Intelligent Platform Management Interface (IPMI) standard (PICMG 2.9) for system management.

The two expansion sites accept both CT Bus enabled PTMC modules and standard PMC modules. PT2MC modules have access to the on-board local CT Bus and timeslot interchange fabric allowing flexible routing of TDM timeslots both between the PTMC sites and the H.110 backplane CT Bus. PT5MC modules also include Gigabit Ethernet connectivity to platform resources. The HW400c/2 automatically detects each module type to provide full mix and match support for using PT2MC, PT5MC or PMC modules in either site.

The 32-bit 33-133 MHz PCI/PCI-X interface supports 3.3V signaling modules with full support for both front and rear I/O access per PICMG 2.3 mapping.

In addition, a 10/100/1000 Ethernet port for system management and application flexibility is included through a front panel RJ45 connector on the board.

Figure 1 shows the block diagram of the HW400c/2.

 Copyright 2006, SBE, Inc.

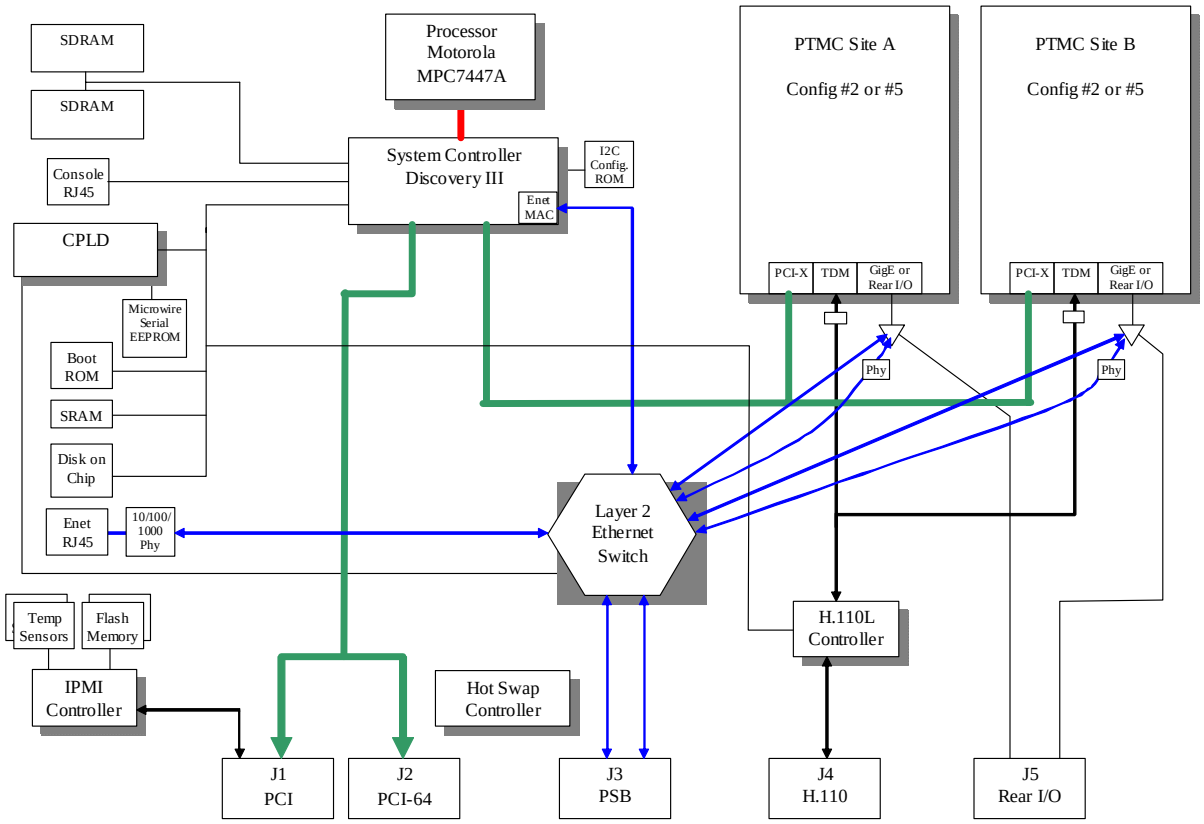

Figure 1. HW400c/2 Block Diagram

2.2 Unpacking Instructions

- If the carton is damaged when you receive it, request that the carrier's agent be present when you unpack and inspect the equipment.
- After unpacking, verify that all items listed in the packing list are present.
- Inspect the equipment for shipping damage.
- Save all packing material for storage or return shipment of the equipment.
- For repairs or replacement of equipment damaged during shipment, contact SBE, Inc. to obtain a Return Materials Authorization (RMA) number and further shipping instructions.

 Copyright 2006, SBE, Inc.

2.3 Handling Procedures

The HW400c/2 board uses CMOS components that can be easily damaged by static electrical discharge. To avoid damage, familiarize yourself with electrostatic discharge (ESD) procedures, which include the following precautions:

- The board should be handled only by trained service personnel at an approved ESD workstation.
- Refer to ANSI/IPC-A-610 developed by the Institute for Interconnecting and Packaging Electronic Circuits (IPC).
- Keep the board in a sealed conductive plastic bag while in transit.
- When installing the board in the field, ground yourself to the system chassis before removing the board from the sealed conductive plastic bag (the power plug must be installed on the system for this to be effective).
- Any equipment used to work on the board must be grounded. Any person handling the board must be grounded.
- Check alignment and polarization of cables and connectors before applying power.
- **Do not** apply external voltages to any devices on the board with power removed from the board.
- **Do not** attempt to straighten any part soldered to the board, as pin breakage or internal damage could occur.

2.4 Hardware Installation of the HW400c/2

The HW400c/2 is designed for use in a 6U CompactPCI enclosure.

Be sure to follow safe ESD procedures when handling electronic hardware.

- Remove the HW400c/2 from the protective bag.
- Slide the HW400c/2 into an available peripheral board slot in the CompactPCI chassis. Check that the board is aligned properly on the card guides.
- Completely insert the board until the top and bottom board ejectors lock into place. If chassis power is on the blue hot swap LED will blink and turn off.
- Tighten top and bottom screws to secure the HW400c/2 in place.

 Copyright 2006, SBE, Inc.

2.5 Returns/Service

Before returning any equipment for service, you must obtain a Return Material Authorization (RMA) number from SBE:

TEL: 800-925-2666 (Toll free, USA)
TEL: +925-355-2000 (Outside of USA)
FAX: +925-355-2020

Ship all returns to SBE's USA service center:

SBE, Inc.
4000 Executive Parkway, Suite 200
San Ramon, CA 94583

SBE's Technical Support Department can be reached at 800-444-0990.

2.6 Operating Environment

The HW400c/2 is designed to function within the environment shown in Table 1.

Table 1. HW400c/2 Operating Environment

Storage temperature	-40 to +85 C (-40 to +185 °F)
Operating temperature:	0 to 55 °C (32 to 131 °F) ambient temperature with a minimum of 200 LFM airflow (basic configuration)
Operating humidity:	10% to 90% non-condensing
Storage humidity:	5% to 95% non-condensing
Power requirements:	36.5 Watts max. (estimated, basic configuration)
Voltages:	5V +5%/-3%, 3.3V +5%/-3%, 12V ±5% (all required)

Bring the HW400c/2 board to operating temperature in a non-condensing environment. The rate of change in board temperature should not exceed 2 °C (35.6 °F) per minute.

 Copyright 2006, SBE, Inc.

2.7 Mean Time Between Failures (MTBF)

The Mean Time Between Failure (MTBF) of SBE, Inc's HW400c/2 was calculated per Telcordia Technical Reference TR-332 Issue 6, December 1997.

The following specific parameters were used:

Prediction method:	Method I (Parts count procedure)
Application conditions:	Case 1 (<1 hr burn-in, 50% electrical stress)
Environment:	Controlled, fixed, ground (mult. factor = 1.0)
Component quality factors:	Quality level II parts (level I on Rs, Cs and LEDs)
Ambient temperature:	50 C
Calculated MTBF:	**>150,000 hours** (not including installed PMC or PTMC modules)

 Copyright 2006, SBE, Inc.

2.8 Regulatory Agency Certifications

The HW400c/2 complies with the requirements listed below.

2.8.1 *Safety*

- IEC60950 International product safety *pending*
- IEC60950 *pending*
- UL60950 *pending*
- Certified Body (CB) Report *pending*

2.8.2 *US and Canadian Emissions*

- FCC Part 15 Class B *pending*
- Industry Canada CS-003 *pending*

2.8.3 *European Emissions and Immunity*

- EN 50082-1 *pending*
- EN 300386-2 (supercedes EN55022)
  to include EN61000-4-6: 10kHz-80MHz, 80%AM 1kHz
  pending

CE Mark approval is included.

2.9 Agency Compliance

The HW400c/2 is designed to comply with the following agency requirements.

- NEBS
- VCC

 Copyright 2006, SBE, Inc.

2.10 Physical Properties

The Highwire 400c/2 is compliant with the mechanical specifications of PCMIG 2.0. Table 2 lists the physical dimensions of the HW400c/2 product. Figure 2 shows the physical profile of the HW400c/2 board.

Table 2. HW400c/2 Physical Dimensions

Length:	9.2 inches (233.68 mm)
Width:	6.3 inches (160.02 mm)
Maximum component height (front):	0.540 inches (13.72 mm)
Maximum component height (back):	0.079 inches (2 mm)
Board thickness:	0.062 inches (1.57 mm)

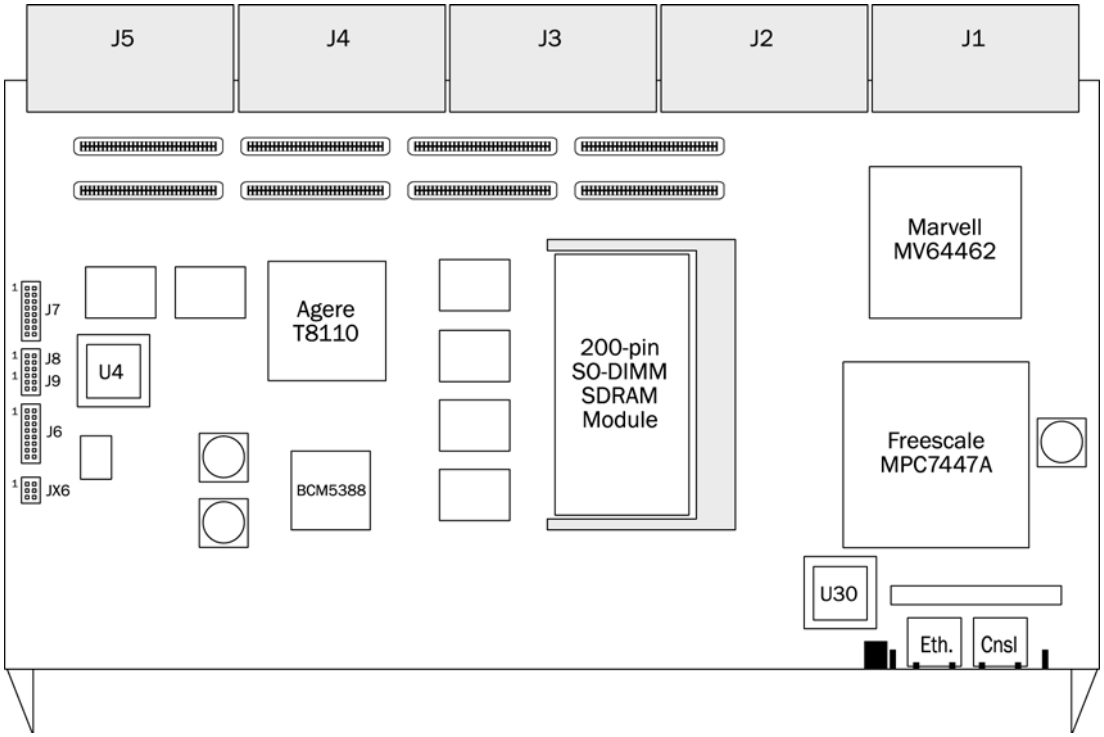

Figure 2. The HW400c/2 PTMC Processing Platform

 Copyright 2006, SBE, Inc.

2.10.1 *HW400c/2 Front Panel*

The HW400c/2 CompactPCI front panel has custom cut outs with the appropriate thickness to accommodate two PTMC bezels (with EMC gaskets), two RJ-45 connectors, blue Hot Swap LED, green power LED, and status LEDs. Figure 3 below shows an illustration of the front panel.

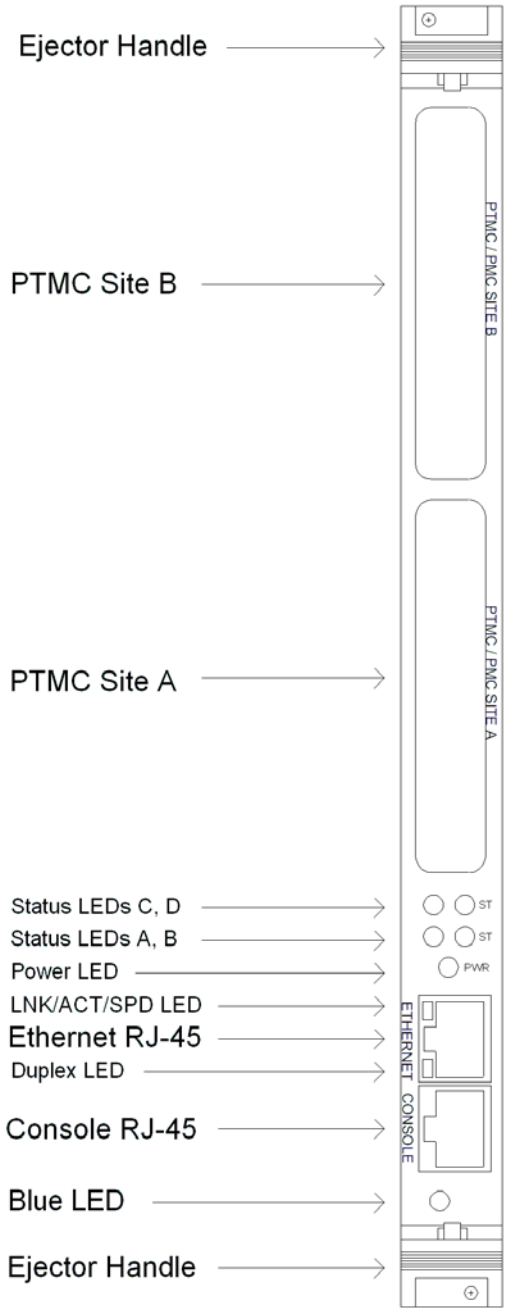

Figure 3. HW400c/2 Front Panel

 Copyright 2006, SBE, Inc.

2.10.2 *Part number and serial number*

All boards are marked with the manufacturing part number and assembly revision. This is marked on a label and affixed to the top of the board.

All boards are serialized physically with a bar code serial number label and affixed to the secondary side of the board.

2.10.3 *Bus Keying*

Keying on the HW400c/2 is used to prevent damage to the card and/or the backplane. There are two keying systems used on the HW400c/2, CompactPCI and PTMC.

2.10.3.1 Compact PCI

As defined in PICMG 2.10, the HW400c/2 has a Strawberry Red key, RAL # 3018, installed in J4 signifying the existence of the H.110 Computer Telephony bus on J4. There is no key installed in J1, signifying universal PCI signaling levels.

2.10.3.2 PTMC Site

The PTMC Sites are capable of **3.3v signaling only**. Therefore cards with 5v only IO signals will be prevented from installation by the presence of key posts installed on the HW400c/2. The key posts are located at each PTMC site, with the location defined in IEEE 1386.

The key posts must not be removed, or damage could result from installation of an incompatible PMC or PTMC card with 5v only IO signals.

The host PCI bus (CompactPCI) and local PCI bus (PTMC Sites) are independent of one another, and may operate at different speeds and bus widths (see Sections 3.2.3 and 3.2.4).

 Copyright 2006, SBE, Inc.

2.10.4 *Power Requirements*

The power requirements of the HW400c/2 are defined for two environments:

- CompactPCI VIO of 5.0v (see Table 3)
- CompactPCI VIO set 3.3v (see Table 4).

1. All voltages are required.
2. The CompactPCI VIO has no effect on the local PCI bus VIO (PTMC sites), which is fixed at 3.3v.

Table 3. HW400c/2 power requirements VIO = 5.0V

	3.3V Current (A)	5.0V Current (A)	12V Current (A)	Total Power (W)
HW400c/2 alone	2.26	6.135	0.05	38.73
PTMC site A capacity	4.54	2.8	0.92	40.02
PTMC site B capacity	4.54	2.8	0.92	40.02
HW400c/2 with PTMC A&B	11.34	11.735	1.89	118.78

Table 4. HW400c/2 power requirements VIO = 3.3V

	3.3V Current (A)	5.0V Current (A)	12V Current (A)	Total Power (W)
HW400c/2 alone	5.04	4.3	0.05	38.73
PTMC site A capacity	4.54	2.8	0.92	40.02
PTMC site B capacity	4.54	2.8	0.92	40.02
HW400c/2 with PTMC A&B	14.12	9.9	1.89	118.78

 Copyright 2006, SBE, Inc.

2.10.5 *Switches*

The HW400c/2 contains single switch that is necessary for normal operation. The switch is an integral part of the lower ejector handle inside the front panel, and is used along with the blue LED (see Figure 3) and the Linear Systems LTC1644, for hot swap. The switch is connected to the PC board at J10 near the lower ejector handle.

For debugging purposes an optional reset/NMI toggle switch and cable is available (see Section 3.1.3). Please contact SBE Technical Support for details.

2.10.6 *Product Configurations*

The HW400c/2 can be manufactured with several configuration options. Specific options include processor type and speed, memory amount, and CompactPCI connector configuration. See Table 6, Table 16, and Section 3.2.3 for related information.

Table 5. HW400c/2 Order time options

	Standard Configuration	**Options**
CPU Speed	1.0 GHz	1.4 Ghz, 1.7Ghz (see Section 3.1)
DDR RAM	256MB	512MB, 1GB (see Section 3.2.2)
H.110 CT bus	Installed	Uninstalled (see Section 3.3.3)
CompactPCI bus	Installed	Uninstalled (See Section 3.2.3)

Options or modifications are available upon request. Please call SBE Sales for option availability, and/or modification requests.

Build options have significant impact on power consumption.

 Copyright 2006, SBE, Inc.

3 FUNCTIONAL BLOCKS

The HW400c/2 has six major functional blocks – the PowerPC processor, system controller, CT Bus interface, Ethernet switch, PTMC expansion sites, and the IPMI controller. The following sections describe these functional blocks in greater detail. Additional features such as the connector pin outs and JTAG development support are also described.

3.1 PowerPC Processor

The standard configuration for the HW400c/2 includes the Freescale MPC7447A PowerPC Processor running at 1000 MHz (1 GHz) with a corresponding system bus speed of 166 MHz. There are two additional processor variants available for the board, which utilize the Freescale MPC7448 PowerPC Processor with a 200 MHz system bus speed.

The operating frequency and power consumption for each processor variant is shown in Table 6.

Table 6. HW400c/2 Processor Options

Processor Type	Operating Frequency (Maximum)	System Bus Frequency (Maximum)	Core Power Consumption (Typical/Maximum)
MPC7447A	1.0 GHz	166 MHz	8.0 / 11.5 W
MPC7448	1.4 GHz	200 MHz	8.0 / 15.9 W
MPC7448	1.7 GHz	200 MHz	21 / 29.8 W

3.1.1 *MPC744X Development/Debug Support*

The HW400c/2 provides external access to the MPC744X processor COP port, reset and interrupt signals at headers J6, Jx6, J7, J8, and J9 (See Figure 2). A console port is also provided on the front panel of the board though an RJ45 modular connector (see Figure 4, and Section 3.1.2).

 Copyright 2006, SBE, Inc.

3.1.2 *Console port*

The front panel console port is connected through the MV64462 via a Linear Systems LTC1386 EIA-562 (low voltage EIA-232) transceiver. The console port is an RJ45 modular connector mounted on the front panel using three wire (Tx, Rx, GND) EIA-232 at 9600 baud, 8N1 (8 bits, No parity, 1 stop bit). Figure 4 shows the console port pin out.

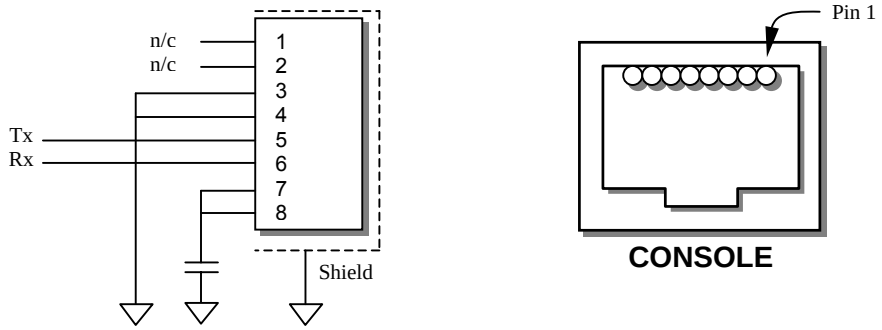

Figure 4. Console port pin out

3.1.3 *Pushbutton Reset / Interrupt*

An optional external pushbutton reset is provided as a 6-pin header (part of J8, J9, see Figure 2, Figure 5, and Table 7) on the board that accepts the standard SBE developer's debug cable with toggle switch. Contact SBE Technical Support for additional details on obtaining a developer's debug cable.

The same toggle switch is also used to generate a non-maskable interrupt (NMI), by pushing it in the opposite direction. The pushbutton interrupt signal is connected to a GPIO port of the Marvell Discovery III System Controller, which can be configured to route it to the MPC744X if desired. See Table 11 for the GPIO port number.

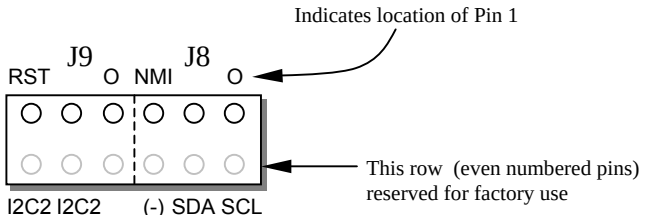

Figure 5. J8, J9 Reset/NMI header

 Copyright 2006, SBE, Inc.

Table 7 describes the pin out of J8 and J9. Some of the pins listed are for Factory use only.

Table 7. J8 and J9 pin out

Header	Pin	Label	Usage
J8	1	O	N/C. The “o” indicates pin one
	2	SCL	TWSI IPMB SCL, for Factory use only
	3	none	N/C. Just below the “J8” header title.
	4	SDA	TWSI IPMB SDA, for Factory use only
	5	NMI	Ground. Used in conjunction with J9, 1, holds microprocessor Non Maskable Interrupt (NMI) active. When used with optional reset/NMI cable toggles NMI.
	6	(-)	Ground. Used with TWSI cable, for Factory use only
J9	1	O	Non Maskable Interrupt (NMI). The “o” indicates pin one. Used in conjunction with J8, 5, holds microprocessor Non Maskable Interrupt (NMI) active.
	2	none	N/C
	3	none	Reset to the microprocessor. Used in conjunction with J9, 5, holds microprocessor in reset. When used with optional reset/NMI cable toggles reset line.
	4	I2C2	Select I2C2, Used with J9-6 to select I2C3 mode. For Factory use only.
	5	RST	Ground. In conjunction with J9-3 to hold microprocessor in reset.
	6	I2C2	Ground. Used with J9-4 to select I2C3 mode. For Factory use only.

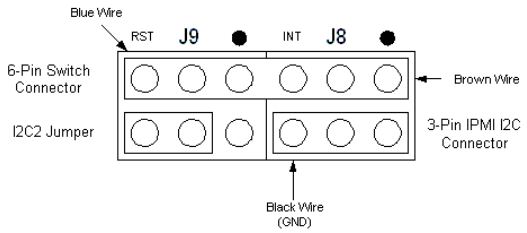

Bottom row of J8 and J9 reserved for Factory use only.

Figure 6. J8 and J9 with optional Reset/NMI cable

 Copyright 2006, SBE, Inc.



Figure 7. Optional Reset/NMI switch

3.1.4 *COP/JTAG Port*

A 16-pin header (J6, see Figure 2, and Figure 8) and a 6-pin header (JX6) are provided on the HW400c/2 board for connecting to the processor's COP (Common On-chip Processor) port for factory development purposes. The J6 header can also be used to access the JTAG chain for the entire board.

The COP/JTAG port uses 3.3V signaling.

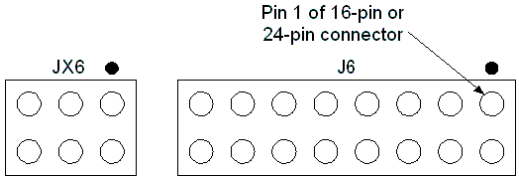

Figure 8. COP/JTAG Pinout

3.1.5 *Special Purpose Jumper Block*

Jumper block J7, located along the top of the board, is used for diagnostic and other special purposes. Under normal operating circumstances these jumpers will remain uninstalled. The IGNP jumper is necessary when in standalone test mode (no PCI bus is present, or no PCI Slot One Master installed). See Figure 9 and Table 8, below.

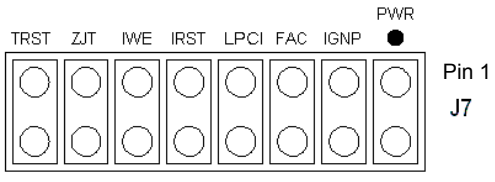

Figure 9. J7 Special purpose jumper block

 Copyright 2006, SBE, Inc.

Table 8. J7 pin functions

3.1.5.1 Jumper Pins	Label	Usage
1-2	PWR	Forces board "late power" to switch "ON" at power-up
3-4	IGNP	Forces board to operate as if no Host PCI bus is present
5-6	FAC	a) Sets "FACT" bit in BSR register for use by software b) Enables writes to Microwire EEPROM lower addresses
7-8	LPCI	Limits Local PCI bus (PTMC sites) to 100MHz maximum frequency
9-10	IRST	Holds IPMI Controller (U92) in reset state. (Required when programming IPMI EEPROMs on-board via the System Controller TWSI interface, see Table 7).
11-12	IWE	Enables writes to the I^2C Configuration ROM (U30)
13-14	ZJT	Connects only IPMI Controller (U92) to JTAG/COP header (J6/JX6)
15-16	TRST	Forces JTAG Reset signal inactive (Required when using Altera ByteBlaster)

3.2 MV64462 System Controller

The HW400c/2 uses the Marvell Discovery III (MV64462) PowerPC System Controller, which acts as the interface between the processor, memory, PCI and device busses (see Figure 1). This section outlines the devices and functions interfaced to the MV64462.

3.2.1 *System Bus*

The system bus interface between the Freescale MPC744X processor and Marvell MV64462 system controller is a 64-bit bus, operating at a speed of 166 MHz or 200 MHz depending on the processor system bus frequency (see Table 6).

3.2.2 *Dual Data Rate (DDR) SDRAM*

One 200-pin SODIMM module is used for the DDR SDRAM. The module is located under one of the PTMC mezzanine cards using a low-profile SODIMM socket.

The HW400c/2 supports DDR SDRAM densities of 256 MB, 512 MB, and 1 GB as order time options. Memory speeds of up to 200 MHz are supported for MPC7448 processors. The memory speed is the same as the processor bus speed, and therefore the memory speed for the standard MPC7447A (1 GHz) configuration is 166 MHz (see Table 6).

 Copyright 2006, SBE, Inc.

3.2.3 *Host PCI Bus*

The Marvell Discovery III (MV64462) host PCI bus (PCI bus 0) provides an interface between the processor and CompactPCI host, as well as between the PTMC sites and the CompactPCI host. The MV64462 device acts as a PCI-to-PCI bridge between the two PCI buses.

The HW400c/2 supports a 64-bit-wide bus operating at 33 or 66 MHz. PCI-X operation at 66 MHz is supported; however 100/133 MHz operation is *not* supported.

3.2.3.1 Operation Without CompactPCI Bus

The HW400c/2 supports the PICMG 2.16 R1.0 specification's requirement that a PICMG 2.16 compliant node card must have the ability to operate without the presence of the CPCI bus. CPCI connectors J1 and J2 are present as they provide power and geographic addressing information; however pin B6 of J1 is redefined as signal PCI_PRSNT# in PICMG 2.16. When the PCI bus is present on the backplane, this pin is defined as GND. If the PCI bus is *not* present on the backplane, then it must leave this pin floating (there is a 10K pull-up on the node).

The state of the PCI_PRSNT# signal is sensed at power-up (or hot-swap) and, if inactive, the backplane PCI signals are ignored, enabling the board to boot up normally. The primary PCI signals from the MV64462 are tri-stated in this case, and the precharge voltage is switched from 1.0V to VIO (3.3V or 5V) to prevent floating signals. The PCI Status Register (PSR) provides the status of the PCI bus (see Section 4.2.10). The software must read this register to determine whether the PCI bus is present or not and configure the board appropriately.

The HW400c/2 can also boot up without the slot 1 card in a CompactPCI chassis. A jumper enables this feature, regardless of the state of the PCI_PRSNT# pin on J1. This jumper is labeled IGNP (part of J7, see Section 3.1.5), and when installed, the PCI reset and clock signals for MV64462 PCI bus 0 are generated internally.

If a Slot 1 card is present and the IGNP jumper is installed, the HW400c/2 will not be able to communicate with the Slot 1 card.

3.2.4 *Local PCI Bus*

The Marvell Discovery III (MV64462) local PCI bus (PCI bus 1) provides an interface between the processor and the two PTMC sites. The local PCI bus is 32-bits wide and operates in PCI mode at 33-66 MHz, or PCI-X mode at 66-133 MHz.

The PCI-X 133 MHz speed is allowed when only one PTMC module is installed, ***and*** it must be installed at Site B. If two PCI-X capable modules are installed, or a PCI-X capable module is installed at Site A, the bus frequency is automatically forced to 100 MHz.

 Copyright 2006, SBE, Inc.

If a PCI-X 133 card is installed in Site B, it may be forced to 100 MHz, by installing the LPCI jumper at J7 (see Section 3.1.5).

Module presence is detected by the state of the BUSMODE1 pin. Interrupts from either of the two sites are fed through the MV64462 GPIO pins, and can be routed to either the on-board processor or through the host PCI bus to the CompactPCI host processor. The local PCI bus is independent of the host PCI bus, that is, the two buses can operate at different speeds and bus widths.

The local PCI Bus I/O voltage is connected to **3.3 volts only**. Therefore, **PTMC modules with 5-volt only I/O signals cannot be used** on the HW400c/2, and are prevented from being installed by a voltage key residing at each site (see Section 2.10.3).

3.2.5 *Serial EEPROM*

The HW400c/2 includes a 4 K-bit non-volatile EEPROM for storing small items such as IP addresses and board serial numbers. This device is the Atmel AT93C66A, which is organized in a 256 x 16-bit format. The EEPROM is accessed through CPLD registers, which control a read/write state machine within the CPLD. See Sections 4.2.25 to 4.2.28 for details on accessing the EEPROM.

Table 9 and Table 10 summarize the contents of the EEPROM. The first 16 addresses (0x00-0x0F) are written by SBE when the boards are manufactured, and must not be modified. Space is reserved in the next 32 addresses (0x10-0x2F) for a total of 16 IP Addresses, beginning with the board IP address and the Gateway IP address. U-boot use the remaining addresses (0x30-0xFF) for boot parameters.

Boot software must read the MAC address from the serial EEPROM and subsequently assign the value to the MV64462 Ethernet Port 0 registers. In Table 9, the MAC address is represented by the sample number 00:A0:D6:12:34:56.

 Copyright 2006, SBE, Inc.

Table 9. Microwire EEPROM Contents, Factory Area

Word Address	Bits 15-8 (MSB)	Typical Value	Bits 7-0 (LSB)	Typical Value
0x00	Payload Length (words)	0x20	Format	0x03
0x01	CRC32 Byte 2	0xCC	CRC32 for address 0x00 and 0x02-0x0F	0xCC
0x02	CRC32 Byte 4	0xCC	CRC32 Byte 3	0xCC
0x03	Subsystem Vendor ID	0x76	Subsystem Vendor ID	0x11
0x04	Subsystem ID	0x01	Subsystem ID	0x0D
0x05	SBE MAC Address Header Byte 2	0xA0	SBE MAC Address Header Byte 1	0x00
0x06	Board Serial Number (BCD) Byte 1	0x12	SBE MAC Address Header Byte 3	0xD6
0x07	Board Serial Number (BCD) Byte 3	0x56	Board Serial Number (BCD) Byte 2	0x34
0x08	Reserved	0x01	Reserved	0x43
0x09	Reserved	0x40	Reserved	0xD5
0x0A	Reserved	0x00	Reserved	0x00
0x0B	Reserved	0x00	Reserved	0x00
0x0C	Reserved	0x00	Reserved	0x00
0x0D	Reserved	0x00	Reserved	0x00
0x0E	Reserved	0x00	Reserved	0x00
0x0F	Reserved	0x00	Reserved	0x00

Shaded areas indicate addresses reserved for programming by SBE at the time the boards are manufactured.

 Copyright 2006, SBE, Inc.

Table 10. Microwire EEPROM Contents, Uboot Area

Word Address	Bits 15-8 (MSB)	Typical Value	Bits 7-0 (LSB)	Typical Value
0x10	Board IP Address byte 1	0xA8	Board IP Address byte 0	0xC0
0x11	Board IP Address byte 3	0x0A	Board IP Address byte 2	0x01
0x12	Gateway IP Address byte 1	0xA8	Gateway IP Address byte 0	0xC0
0x13	Gateway IP Address byte 3	0x0A	Gateway IP Address byte 2	0x01
0x14	Server IP Address byte 1	0xA8	Server IP Address byte 0	0xC0
0x15	Server IP Address byte 3	0x0A	Server IP Address byte 2	0x01
0x16 – 0x2D	Reserved for other IP Addresses	0xFF	Reserved for other IP Addresses	0xFF
0x2E	Netmask byte 1	0xFF	Netmask byte 0	0xFF
0x2F	Netmask byte 3	0x00	Netmask byte 2	0xFF
0x30	Baud byte 1	0x36	Baud byte 0	0x39
0x31	Baud byte 3	0x30	Baud byte 2	0x30
0x32	Baud byte 1	0x30	Baud byte 0	0x00
0x33	CRC32 byte 3	N/A	CRC32 byte 2	N/A
0x34	CRC32 byte 1	N/A	CRC32 byte 0	N/A
0x35 – 0x3A	Reserved	0xFF	Reserved	0xFF
0x3B	Load Address byte 1	0xFF	Load Address byte 0	0xFF
0x3C	Load Address byte 3	0xFF	Load Address byte 2	0xFF
0x3D	Load Address byte 5	0xFF	Load Address byte 4	0xFF
0x3E	Load Address byte 7	0xFF	Load Address byte 6	0xFF
0x3F	Boot Delay byte 1	0x00	Boot Delay byte 0	0x35
0x40 – 0x5F	Boot Filename (32 bytes)	N/A	Boot Filename (32 bytes)	N/A
0x60 – 0xAF	Boot Arguments (80 bytes)	N/A	Boot Arguments (80 bytes)	N/A
0xB0 – 0xFF	Boot Command (80 bytes)	N/A	Boot Command (80 bytes)	N/A

Addresses are typically modified by the user through the U-boot software.

 Copyright 2006, SBE, Inc.

3.2.6 *MV64462 Ethernet Interface*

The MV64462 contains an Ethernet MAC, which provides a MAC-to-MAC connection to port 7 of the on-board Broadcom BMC5388 layer 2 Ethernet switch (see Table 14). The connection is made via the RGMII ports on each device. The operating speed of the RGMII port is 125 MHz.

3.2.7 *MV64462 Device Interface*

The Discovery III Device Interface connects the following functional elements:

- SRAM Device
- Boot PROM
- Disk-on-Chip
- CT Bus Controller
- CPLD

The device bus is a 32-bit interface with a default operating frequency of 100 MHz. The following sections provide additional detail for each of the functional elements.

3.2.7.1 SRAM Device

The HW400c/2 includes a 512 KB SRAM device with a 32-bit wide data bus necessary for the processor to boot. The device supports burst reads and writes.

3.2.7.2 Boot PROM

A 4 Mbit (512 KB) Boot PROM device is supported in a PLCC socket (XU4) that is located underneath PTMC site B. The device allows for easy upgrade of boot and/or diagnostic code. The socket also accepts most EPROM emulator cables. Burst reads/writes to the boot ROM are **not** supported.

3.2.7.3 Disk-on-Chip

A Disk-on-Chip (DoC) flash file system device is used on the HW400c/2 for data storage. DoC is a high-density flash device manufactured by M-Systems Incorporated, with a data bus width of 16 bits. The 128 MB device is standard on the HW400c/2, with the option of populating other devices for OEM configurations. Burst reads/writes to the DoC are not possible due to the maximum input clock frequency of the device (33 MHz) being slower than the 100 MHz device bus clock.

 Copyright 2006, SBE, Inc.

3.2.7.4 CT Bus Controller

The Agere T8110L CT bus controller on the HW400c/2 board is accessed and programmed via the device bus. It also has a data bus width of 16 bits. Burst reads/writes are not supported by the T8110L. See Section 3.3 for details about the CT Bus Controller functions.

3.2.7.5 CPLD

The Complex Programmable Logic Device (CPLD) registers are also accessed via the device bus, using an 8-bit data bus width. Miscellaneous signals such as resets and mezzanine card selection logic are monitored and controlled by the CPLD registers. The CPLD supports burst reads and writes. See Section 4.2 for details about CPLD register functions.

3.2.8 *Watchdog Timer*

The Marvell MV64462 Discovery III system controller contains an internal 32-bit Watchdog Timer that can be configured as a source of interrupt to either the MPC744X processor or to the CompactPCI host through the PCI interrupt output. The IPMI controller can also detect a Watchdog timeout by checking the appropriate GPIO bit (see Table 22 in Section 3.6).

3.2.9 *Reset*

The following types of reset are available:

- Power–on reset. Resets the entire board during hot-swap or power-up.
- Optional external pushbutton reset. See Section 3.2.9 for details.
- Host PCI reset. This reset is routed through the Early Power CPLD, allowing the host on the CompactPCI bus to reset all devices on the HW400c/2 board.
- Individual device reset. The PTMC sites, the T8110L, the Ethernet Switch and PHYs and the Disk on Chip can all be individually reset via the CPLD register bits (see Section 4.2.16)
- Software reset (warm reset). Initiated by writing to the CPLD's Warm Reset Register (WRR, see Section 4.2.18), resets the CPU, System Controller, and all on board devices. Host PCI reset signal is not affected by warm reset.

 Copyright 2006, SBE, Inc.

3.2.10 *Multi-Purpose Port (MPP) Usage*

The MV64462 Discovery III includes a 32-bit Multi-Purpose Port (MPP) that can be used for a variety of possible functions. The HW400c/2 board uses the MPP for the serial Console Port signals (front-panel RJ-45), REQ and GNT signals for the local PCI bus, I2C EEPROM activity indicator (used during boot*), and as a detector for the various on-board interrupt sources.

Interrupts from the PTMC sites, the T8110L, the Ethernet PHYs, the Disk-on-Chip, and the optional external pushbutton are connected individually to GPIO ports of the Discovery III, which can then be configured to route them either to the MPC744X, or to the host through the PCI interrupt output.

Table 11 lists the MV64462 MPP pin connections on the HW400c/2 board.

Table 11. MV64462 Multi-Purpose Port Assignments

MPP Pin	Multiplex Number	Pin Function	In/Out of Disco III	Active High/Low	Signal Description
MPP0	0x2	S0_TXD	Out	High	Console Port (RJ-45) TXD
MPP1	0x2	S0_RXD	In	High	Console Port (RJ-45) RXD
MPP2	0x1	PCI1_GNTn[0]	Out	Low	GNT to PTMC Site A
MPP3	0x1	PCI1_REQn[0]	In	Low	REQ from PTMC Site A
MPP4	0x1	PCI1_GNTn[1]	Out	Low	GNT to PTMC Site B
MPP5	0x1	PCI1_REQn[1]	In	Low	REQ from PTMC Site B
MPP6	0x0	GPIO6	Out	Low	Disk-on-Chip Lock
MPP7	0x4	INITACT	Out	High	I2C EEPROM Active*
MPP14	0x0	GPIO14	In	Low	Pushbutton Interrupt
MPP15	0x0	GPIO15	In	Low	CPU Temp Sensor TCRIT
MPP16	0x4	WD_NMIn	Out	Low	Watchdog Signal to IPMI
MPP17	0x0	GPIO17	In	Low	INTA from PTMC site A
MPP18	0x0	GPIO18	In	Low	INTB from PTMC site A
MPP19	0x0	GPIO19	In	Low	INTC from PTMC site A
MPP20	0x0	GPIO20	In	Low	INTD from PTMC site A
MPP21	0x0	GPIO21	In	Low	INTA from PTMC site B
MPP22	0x0	GPIO22	In	Low	INTB from PTMC site B
MPP23	0x0	GPIO23	In	Low	INTC from PTMC site B
MPP24	0x0	GPIO24	In	Low	INTD from PTMC site B
MPP25	0x0	GPIO25	In	High	T8110L Clock Error
MPP26	0x0	GPIO26	In	High	T8110L System Error
MPP27	0x0	GPIO27	In	Low	PHY A Interrupt
MPP28	0x0	GPIO28	In	Low	PHY B Interrupt
MPP29	0x0	GPIO29	In	Low	PHY R Interrupt (RJ-45)
MPP30	0x0	GPIO30	In	Low	Disk-on-Chip Interrupt
MPP31	0x0	GPIO31	In	Low	Disk-on-Chip Busy Signal

* By default, the HW400c/2 uses the I2C EEPROM during boot. The EEPROM must contain the appropriate register setting to configure MPP7 as the INITACT output. This signal is then pulled low after the EEPROM loads to initiate the processor boot

 Copyright 2006, SBE, Inc.

3.3 Computer Telephony Bus Controller

The HW400c/2 includes the Agere T8110L CT Bus Controller to control TDM bus switching between the backplane (CompactPCI J4 connector) and the local bus, which is connected to the JN3 connector on each of the two PTMC sites.

3.3.1 *H.110 Interface (T8110L)*

The Agere T8110L is a H.110 CT Bus controller that provides a complete interface between the backplane H.110 CT bus and local PTMC CT bus through a dynamically controllable switching fabric. The H.110 interface connects to all 32 bi-directional TDM streams of the backplane H.110 bus via the CPCI J4 connector using the PICMG 2.5 R1.0 standard mapping. It can access any of the 4096 time slots carried on the H.110 bus.

The local CT bus, with 32 bi-directional TDM connections, can be programmed for data rates of 2.048Mb/s, 4.092Mb/s or 8.192Mb/s. The local CT bus of the T8110L is connected to each of the PTMC sites via the JN3 connectors.

The PTMC configuration 2 (PT2MC) type modules only support 20 CT bus streams, while PTMC configuration 5 (PT5MC) modules support all 32 CT bus streams.

3.3.2 *T8110L Clocking Interface (T8110L)*

The T8110L LSC [3:0] output pins are connected to the PTMC Output Clock Drivers located in the CPLD. The LSC[3:0] pins are programmed as shown in Table 6.

Table 12. LSC Assignments

LSC output	Signal Assignment
LSC0	CT_C8
LSC1	CT Frame
LSC2	NETREF1
LSC3	NETREF2

Figure 10 shows the local CT Bus clocking signals and how they are routed.

 Copyright 2006, SBE, Inc.

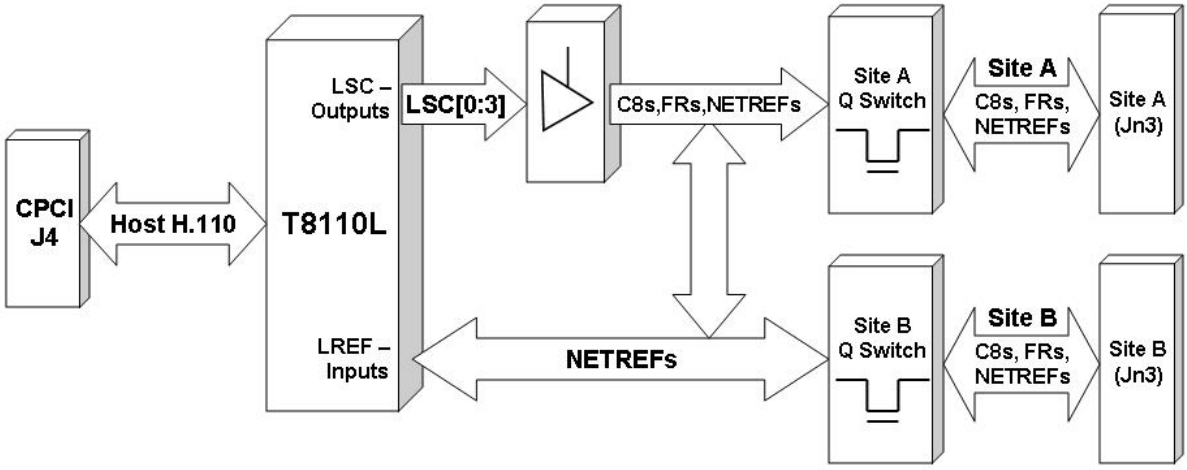

Figure 10. Local CT Bus Clocking Block Diagram

Control for the local "A" and "B" bus drivers is provided by bits 4, 5, 6, and 7 in the Clock Select Register (CSR). Refer to Section 4.2.1 for further details. Figure 11 shows the implementation.

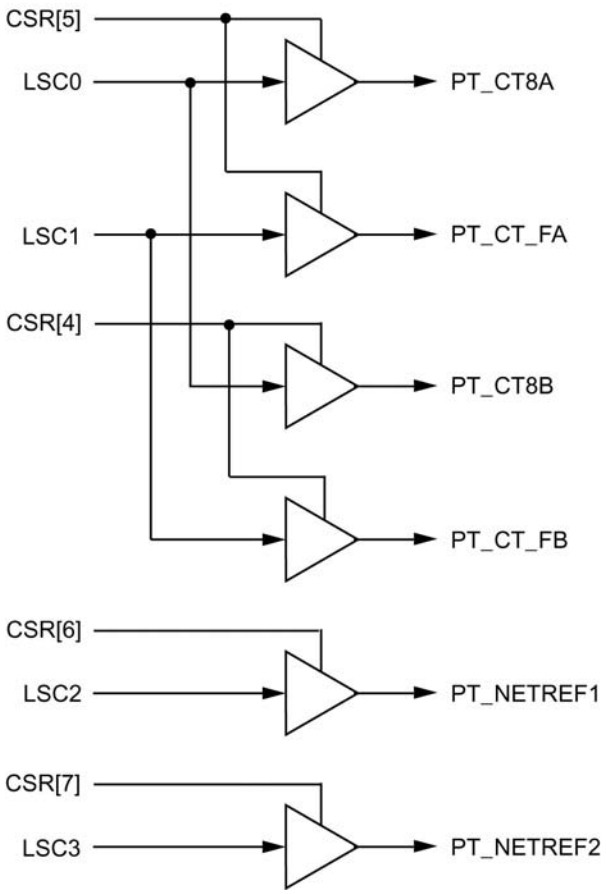

Figure 11. Local CT Bus Clock Generation

 Copyright 2006, SBE, Inc.

The T8110L can be programmed such that its local frame reference (LREF [3:2]) inputs are used to generate all of the TDM bus clocks and syncs. The T8110L Local Clock Reference Inputs have been assigned to the PTMC JN3 H.110 clock pins as shown in Table 13.

Table 13. LREF [3:2] Assignments

LREF input	Assigned to Clock
LREF2	PT_NETREF1
LREF3	PT_NETREF2

3.3.3 *Operation in Non-H.110 Backplane*

The default HW400c/2 configuration has the H.110 interface installed. However, in the event that the HW400c/2 board is used in a PICMG 2.16 chassis that does not have an H.110 bus or the H.110 interface is not installed, the CT_EN pin on J4 (pin C23) is not grounded. The state of the CT_EN pin is stored in bit 7 of the CPLD BSR register for access by software (see 4.2.2). If H.110 is not present, the H.110 interface should not be enabled.

Even if the H.110 bus is not available on the CompactPCI backplane, the *local* CT Bus connections are still valid and therefore PTMC Site A and PTMC Site B can communicate via the CT Bus that is local to the HW400c/2 board.

3.4 Layer 2 Ethernet Switch

The Broadcom BCM5388 Layer 2 Ethernet switch connects to the various devices on the HW400c/2 board. The BCM5388 has four Gigabit Ethernet ports with integral MAC/PHYs, and four additional Gigabit MACs with external RGMII connections. Three of the additional MACs are connected to Broadcom BCM5461S external PHYs, and one is connected directly to the MV64462 MAC port as shown in Table 14.

Table 14. Layer 2 Switch Port Assignments

Switch Port	Device or Port	PHY Address	Connection Type
7	MV64462 System Controller	N/A	MAC-to-MAC RGMII
6	Front Panel RJ-45	00110	1 External PHY
2	PT5MC Slot A, Link Port A	N/A	1 Integral PHY
4	PT5MC Slot A, Link Port B	00100	1 External PHY
3	PT5MC Slot B, Link Port A	N/A	1 Integral PHY
5	PT5MC Slot B, Link Port B	00101	1 External PHY
0	PSB Link Port A	N/A	1 Integral PHY
1	PSB Link Port B	N/A	1 Integral PHY

 Copyright 2006, SBE, Inc.

3.4.1 *Switch Registers Initialization and Monitoring*

The switch is initialized and its registers polled by utilizing its SPI bus interface. This interface is connected through the CPLD. For a description of how to access the SPI interface, please refer to Section 4.4.

3.4.2 *MV64462 System Controller Ethernet Interface*

The Marvell MV64462 System Controller on the HW400c/2 can be accessed via the BCM5388 Ethernet switch. The connection speed must be set to 1000 Mbps and is a MAC-to-MAC connection with the clock sourced from the Ethernet switch. The transmitter signals from the switch are connected to the receiver signals on the system controller, and vice-versa for a direct MAC-to-MAC connection.

3.4.3 *Front Panel (RJ-45) Ethernet Interface*

The HW400c/2 board includes a fully shielded RJ-45 (with integrated transformer and two green LEDs) located at the front panel that provides an Ethernet LAN interface. The port is auto-negotiating and auto-sensing, and operates at 10/100/1000 Mbps. The left LED (looking at the port) indicates Link/Activity/Speed and the right LED indicates collision detection (See Figure 12).

The Link/Activity/Speed LED indication is as follows:

- solid green when the network link is up;
- blinking at 3 Hz for 10 Mb/s Tx or Rx;
- blinking at 6 Hz for 100 Mb/s Tx or Rx;
- and blinking at 12 Hz for 1000 Mb/s Tx or Rx.

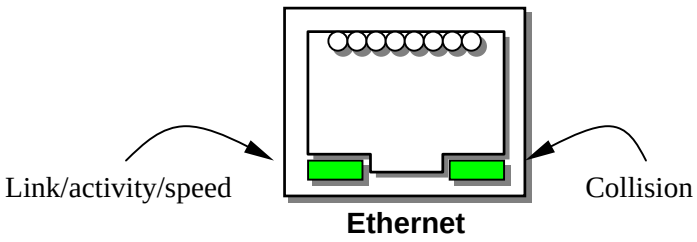

Figure 12. Front panel Ethernet RJ-45 LEDs

 Copyright 2006, SBE, Inc.

3.4.4 *PT5MC Ethernet Ports*

Each of the two PT5MC sites on the HW400c/2 have two 10/100/1000 Mbps ports connected to the Ethernet switch. The signals conform to PICMG ECN 2.15-1.0-001, using the first 24 pins of the respective JN4 connectors.

The JN4 Ethernet connections are switched to the CompactPCI J3 connector using a FET switch specially designed for signals such as Gigabit Ethernet. The PTID bits control the FET, when a PT5MC module is installed in either mezzanine card site. Should a non-PT5MC module be installed in one of the sites, the JN4 signals for that site are routed to the CompactPCI J5 connector as user I/O according to PICMG 2.3 R1.0.

JN4 pins 5, 6, 11, 12, 17, 18, 23 and 24 are switched to ground through discrete FETs at the JN4 connector when a PT5MC module is installed. This has the effect of grounding the respective connections at the CompactPCI J5 connector as well, so caution must be exercised not to damage circuitry on an installed RTM.

PT5MC cards with network connections through Pn4, *must* be transformer coupled or the link to the layer 2 switch will not be established.

3.4.5 *CompactPCI Packet Switch Backplane (cPSB) Ports*

Two of the 10/100/1000BaseT ports of the Ethernet switch, Port 0 and Port 1, are routed to the CompactPCI J3 connector as specified for Packet Switching Backplane (PSB) in PICMG 2.16. See Table 14 and Table 15. The HW400c/2 is configured as a PCIG 2.16 Node card.

3.4.5.1 CompactPCI Connector J3, power and ground

The HW400c/2 uses some of the J3 pins, designated by the PICMG 2.16 as User I/O, as power and ground pins in order to provide enough current to handle some of the more power hungry PTMC cards. These power pins cannot be disconnected. This can damage to some Rear Transition Modules (RTM). The SBE assigned power and ground pins are shown in **bold** in Table 15.

 Copyright 2006, SBE, Inc.

Table 15. Compact PCI connector J3 pin out

	A	B	C	D	E
1	**+5.0v**	**+5.0v**	N/C	N/C	N/C
2	**+5.0v**	**+12v**	N/C	N/C	N/C
3	N/C	N/C	N/C	N/C	N/C
4	LED Clock	N/C	N/C	N/C	N/C
5	N/C	N/C	N/C	N/C	N/C
6	LED Data	N/C	N/C	N/C	GND
7	N/C	N/C	N/C	N/C	N/C
8	**+3.3v**	N/C	**GND**	**GND**	N/C
9	**+3.3v**	N/C	N/C	N/C	GND
10	**+3.3v**	N/C	N/C	N/C	N/C
11	N/C	**GND**	**GND**	N/C	N/C
12	N/C	N/C	N/C	N/C	N/C
13	N/C	N/C	N/C	N/C	N/C
14	**GND**	**GND**	**GND**	**GND**	**GND**
15	LPb DB+	LPb DB-	GND	LPb DD+	LPb DD-
16	LPb DA+	LPb DA-	GND	LPb DC+	LPb DC-
17	LPa DB+	LPa DB-	GND	LPa DD+	LPa DD-
18	LPa DA+	LPa DA-	GND	LPa DC+	LPa DC-
19	**GND**	**GND**	**GND**	**GND**	**GND**

3.4.6 *On-board Ethernet Indicator LEDs*

The HW400c/2 includes eight on-board LEDs for monitoring the status of the various Ethernet ports. The LEDs are labeled L0-L8 and are located near CompactPCI connector J5.

The BCM5388 has a serial LED interface, from which the status of all eight ports can be extracted. The serial LED signal is routed to the CPLD, which contains a state machine that decodes the LED states for each port. The eight status LEDs on the top edge of the HW400c/2 board can be configured to show the status for all eight Ethernet ports. Each status LED gives the status for its corresponding port in the Link/Activity/Speed format. The CPLD LED registers control the selection of Ethernet status, boot status, or general debug modes for the eight LEDs.
The serial LED interface signals are also routed to the RTM through CompactPCI connector J3.

LEDMODE settings on the BCM5388 are hardwired to “101” (see Serial LED Interface section in the BCM5388 datasheet).

 Copyright 2006, SBE, Inc.

The Link/Activity/Speed LED indication is as follows:

- solid green when the network link is up
- blinking at 3 Hz for 10 Mb/s Tx or Rx;
- blinking at 6 Hz for 100 Mb/s Tx or Rx;
- blinking at 12 Hz for 1000 Mb/s Tx or Rx.

An optional front panel 2-high LED is provided as a status indicator for the Ethernet ports. The optional LEDs are shown as LEDs C and D in Figure 3, and by default are not present. The left LED indicates Link/Activity/Speed and the right LED indicates Collision detection for the selected port. A port is selected by setting the appropriate CPLD bit. The default selection (when present) is the Marvell MV64462 System Controller MAC.

See Section 4.2 for details on setting the LED modes.

 Copyright 2006, SBE, Inc.

3.5 Mezzanine Card Sites

The HW400c/2 board supports I/O expansion using either one or two industry-standard PTMC and/or PMC modules. This section provides technical details for these expansion sites.

3.5.1 *PT5MC Type Mezzanine Cards*

The PT5MC mezzanine card support includes connection to the local PCI bus (32-bit, 33-133 MHz PCI or PCI-X), the local 32 TDM stream H.110 bus, two Gigabit Ethernet ports, and 31 pins of User I/O connected to the CompactPCI J5 backplane connector.

PT5MC cards with network connections through Pn4, *must* be transformer coupled or the link to the layer 2 switch will not be established.

3.5.2 *PT2MC Type Mezzanine Cards*

The PT2MC mezzanine card support includes connection to the local PCI bus (32-bit, 33-133 MHz PCI or PCI-X), the local 20 TDM stream H.110 bus, and 55 pins of User I/O connected to the CompactPCI J5 backplane connector. RMII signals are not supported, therefore these lines cannot be used by the PT2MC cards.

3.5.3 *PMC Type Mezzanine Cards*

The PMC mezzanine card support includes connection to the local PCI bus (32-bit, 33-133 MHz PCI or PCI-X), and 55 pins of User I/O connected to the CompactPCI J5 backplane connector.

PMC cards have specified Jn3 as user defined I/O or 64 bit PCI. However, on the HW400c/2, these lines are assigned only to the CT bus and RGMII bus, so when a PMC card is installed the signals on Jn3 are tri-stated (see Table 17).

 Copyright 2006, SBE, Inc.

3.5.4 *Mezzanine Card Power*

Each of the two mezzanine card sites on the HW400c/2 is allotted a portion of the total power budget for the board. For the standard version, the mezzanine power budget is 16.2 Watts for each slot, while the optional high-power version allows 26.4 Watts for each slot. The power budget is divided between the 3.3V, 5V, and 12V power rails as shown in Table 16.

Table 16. Mezzanine Card Power Budget

HW400c/2 Version	Mezzanine Card Total Power (per site)	Power (per site)		
		3.3V power (Per slot)	5V power (Per slot)	12V power (Per slot)
Standard without J4	16.2 Watts	10 Watts	5 Watts	1.2 Watts
Standard with J4	29.4 Watts	15 Watts	12 Watts	2.4 Watts
Optional High Power with J4	26.4 Watts	16.5 Watts	7.5 Watts	2.4 Watts

The standard version with additional power supplied from the CompactPCI J4 connector yields the highest power rating for the mezzanine card slots, because that version has a lower power processor than the optional high-power version.

3.5.5 *PTMC/PMC Connector Summary*

Table 17 summarizes the mezzanine card connections for each supported type. Both sites A and B support the same array of connections. Connector pin outs are shown in Sections 3.5.6, 3.5.7, and 3.5.8

Table 17. PTMC/PMC Connector Summary

Mezzanine Card Type	JN1/JN2	JN3	JN4
PMC	PCI or PCI-X	Not Used (tri-stated)	55 Pins User I/O
PT2MC	PCI or PCI-X	Local CT Bus (20-bit)	55 Pins User I/O
PT5MC	PCI or PCI-X	Local CT Bus (32-bit)	2 LAN Ports 31 Pins User I/O

 Copyright 2006, SBE, Inc.

3.5.6 *PTMC Jn1 and Jn2 PCI Connectors*

Communication using the local PCI bus is done across two PTMC/PMC connectors, JN1 and JN2. Table 18 shows the 32-bit PCI connector pin assignment for JN1 and JN2 on the HW400c/2 as defined by the PMC specification IEEE P1386.1.

Table 18. PTMC Jn1 and Jn2 Connector Pin Assignments

Pn1 32-Bit PCI			
Pin #	Signal Name	Signal Name	Pin #
1	TCK	-12V	2
3	Ground	INTA#	4
5	INTB#	INTC#	6
7	BUSMODE1#	+5V	8
9	INTD#	PCI-RSVD*	10
11	Ground	3.3Vaux	12
13	CLK	Ground	14
15	Ground	GNT#	16
17	REQ#	+5V	18
19	V (I/O)	AD[31]	20
21	AD[28]	AD[27]	22
23	AD[25]	Ground	24
25	Ground	C/BE[3]#	26
27	AD[22]	AD[21]	28
29	AD[19]	+5V	30
31	V (I/O)	AD[17]	32
33	FRAME#	Ground	34
35	Ground	IRDY#	36
37	DEVSEL#	+5V	38
39	Ground	LOCK#	40
41	PCI-RSDV*	PCI-RSVD*	42
43	PAR	Ground	44
45	V (I/O)	AD[15]	46
47	AD[12]	AD[11]	48
49	AD[09]	+5V	50
51	Ground	C/BE[0]#	52
53	AD[06]	AD[05]	54
55	AD[04]	Ground	56
57	V (I/O)	AD[03]	58
59	AD[02]	AD[01]	60
61	AD[00]	+5V	62
63	Ground	REQ64#	64

Pn2 32-Bit PCI			
Pin #	Signal Name	Signal Name	Pin #
1	+12V	TRST#	2
3	TMS	TDO	4
5	TDI	Ground	6
7	Ground	PCI-RSVD*	8
9	PCI-RSVD*	PCI-RSVD*	10
11	BUSMODE2#	+3.3V	12
13	RST#	BUSMODE3#	14
15	+3.3V	BUSMODE4#	16
17	PME#	Ground	18
19	AD[30]	AD[29]	20
21	Ground	AD[26]	22
23	AD[24]	+3.3V	24
25	IDSEL	AD[23]	26
27	+3.3V	AD[20]	28
29	AD[18]	Ground	30
31	AD[16]	C/BE[2]#	32
33	Ground	PMC-RSVD	34
35	TRDY#	+3.3V	36
37	Ground	STOP#	38
39	PERR#	Ground	40
41	+3.3V	SERR#	42
43	C/BE[1]#	Ground	44
45	AD[14]	AD[13]	46
47	M66EN	AD[10]	48
49	AD[08]	+3.3V	50
51	AD[07]	PMC-RSVD	52
53	+3.3V	PMC-RSVD	54
55	PMC-RSVD	Ground	56
57	PMC-RSVD	PMC-RSVD	58
59	Ground	PMC-RSVD	60
61	ACK64#	+3.3V	62
63	Ground	PMC-RSVD	64

 Copyright 2006, SBE, Inc.

3.5.7 *PTMC Jn3 CT Bus Connector*

Table 19 shows the PTMC Pn3 CT Bus connector pin assignment for the HW400c/2 for both Configuration #2 (PT2MC) and Configuration #5 (PT5MC). The signal definitions for Pn3 are per the PICMG 2.15 specification.

Table 19. PTMC Configuration #2/#5 Pn3 Connector Pin Assignment

Pn3 PT2MC			
Pin #	Signal Name	Signal Name	Pin #
1	Hi Z	Ground	2
3	Ground	STX (N/C)	4
5	Hi Z	SRX (N/C)	6
7	Hi Z	Ground	8
9	PTID2	Hi Z	10
11	PTGNDZ	Hi Z	12
13	Hi Z	Ground	14
15	Ground	Hi Z	16
17	LCT_FA	Hi Z	18
19	LCT_FB	Ground	20
21	PTID0	Hi Z	22
23	PTGNDZ	Hi Z	24
25	LCT_C8A	Ground	26
27	Ground	LCT_D19	28
29	LCT_D18	LCT_D17	30
31	LCT_D16	Ground	32
33	Ground	NETREF2	34
35	LCT_D14	Hi Z	36
37	LCT_D12	Ground	38
39	PTENB#	Hi Z	40
41	PTGNDZ	NETREF1	42
43	LCT_C8B	Ground	44
45	Ground	LCT_D15	46
47	LCT_D10	LCT_D13	48
49	LCT_D8	LCT_D11	50
51	Ground	LCT_D9	52
53	LCT_D6	LCT_D7	54
55	LCT_D4	Ground	56
57	PTID1	LCT_D5	58
59	LCT_D2	LCT_D3	60
61	LCT_D0	Ground	62
63	Ground	LCT_D1	64

Pn3 PT5MC			
Pin #	Signal Name	Signal Name	Pin #
1	LCT_D26	Ground	2
3	Ground	STX (N/C)	4
5	LCT_D24	SRX (N/C)	6
7	LCT_D22	Ground	8
9	PTID2	LCT_D31	10
11	PTGNDZ	LCT_D29	12
13	LCT_D20	Ground	14
15	Ground	LCT_D27	16
17	LCT_FA	LCT_D25	18
19	LCT_FB	Ground	20
21	PTID0	LCT_D23	22
23	PTGNDZ	LCT_D21	24
25	LCT_C8A	Ground	26
27	Ground	LCT_D19	28
29	LCT_D18	LCT_D17	30
31	LCT_D16	Ground	32
33	Ground	NETREF2	34
35	LCT_D14	LCT_D30	36
37	LCT_D12	Ground	38
39	PTENB#	LCT_D28	40
41	PTGNDZ	NETREF2	42
43	LCT_C8B	Ground	44
45	Ground	LCT_D15	46
47	LCT_D10	LCT_D13	48
49	LCT_D8	LCT_D11	50
51	Ground	LCT_D9	52
53	LCT_D6	LCT_D7	54
55	LCT_D4	Ground	56
57	PTID1	LCT_D5	58
59	LCT_D2	LCT_D3	60
61	LCT_D0	Ground	62
63	Ground	LCT_D1	64

For PT2MC cards, the PT2MC MII signals are tri-stated (Hi Z), as they are hard wired to the CTbus for PT5MC use.
PTMC Serial Port signals (STX and SRX) are not connected on the HW400c/2.

 Copyright 2006, SBE, Inc.

3.5.8 *PTMC Jn4 LAN/User I/O Connector*

Table 20 (Site A) and Table 21 (Site B) show the PTMC Pn4 LAN and/or User I/O connector pin assignment for the HW400c/2 for both Configuration #2 (PT2MC User I/O only) and Configuration #5 (PT5MC LAN and User I/O).

3.5.8.1 PTMC Site A Jn4

This table shows the connections from PTMC Site A Jn4, to the Compact PCI connector J5 and, for PT5MC, the signals for the Ethernet ports, Link Ports A and B.

LPa (Link Port A) and LPb (Link Port B) for PTMC Site A go to the Ethernet Switch ports 2 and 4 respectively. See Table 14.

PT5MC cards with network connections through Pn4, *must* be transformer coupled or the link to the layer 2 switch will not be established.

 Copyright 2006, SBE, Inc.

Table 20. PTMC Site A Configuration #2/#5 Pn4 Connector Pin Assignment

Pn4 PT2MC			
Pin #	Signal Name	Signal Name	Pin #
1	cPCI J5 E22	cPCI J5 D22	2
3	cPCI J5 C22	cPCI J5 B22	4
5	cPCI J5 A22	cPCI J5 E21	6
7	cPCI J5 D21	cPCI J5 C21	8
9	cPCI J5 B21	cPCI J5 A21	10
11	cPCI J5 E20	cPCI J5 D20	12
13	cPCI J5 C20	cPCI J5 B20	14
15	cPCI J5 A20	cPCI J5 E19	16
17	cPCI J5 D19	cPCI J5 C19	18
19	cPCI J5 B19	cPCI J5 A19	20
21	cPCI J5 E18	cPCI J5 D18	22
23	cPCI J5 C18	cPCI J5 B18	24
25	cPCI J5 A18	cPCI J5 E17	26
27	cPCI J5 D17	cPCI J5 C17	28
29	cPCI J5 B17	cPCI J5 A17	30
31	cPCI J5 E16	cPCI J5 D16	32
33	cPCI J5 C16	cPCI J5 B16	34
35	cPCI J5 A16	cPCI J5 E15	36
37	cPCI J5 D15	cPCI J5 C15	38
39	cPCI J5 B15	cPCI J5 A15	40
41	cPCI J5 E14	cPCI J5 D14	42
43	cPCI J5 C14	cPCI J5 B14	44
45	cPCI J5 A14	cPCI J5 E13	46
47	cPCI J5 D13	cPCI J5 C13	48
49	cPCI J5 B13	cPCI J5 A13	50
51	cPCI J5 E12	cPCI J5 D12	52
53	cPCI J5 C12	cPCI J5 B12	54
55	cPCI J5 A12	N/C	56
57	N/C	N/C	58
59	N/C	N/C	60
61	N/C	N/C	62
63	N/C	N/C	64

Pn4 PT5MC			
Pin #	Signal Name	Signal Name	Pin #
1	LPa_DA+	LPa_DC+	2
3	LPa_DA-	LPa_DC-	4
5	Ground	Ground	6
7	LPa_DB+	LPa_DD+	8
9	LPa_DB-	LPa_DD-	10
11	Ground	Ground	12
13	LPb_DA+	LPb_DC+	14
15	LPb_DA-	LPb_DC-	16
17	Ground	Ground	18
19	LPb_DB+	LPb_DD+	20
21	LPb_DB-	LPb_DD-	22
23	Ground	Ground	24
25	cPCI J5 A18	cPCI J5 E17	26
27	cPCI J5 D17	cPCI J5 C17	28
29	cPCI J5 B17	cPCI J5 A17	30
31	cPCI J5 E16	cPCI J5 D16	32
33	cPCI J5 C16	cPCI J5 B16	34
35	cPCI J5 A16	cPCI J5 E15	36
37	cPCI J5 D15	cPCI J5 C15	38
39	cPCI J5 B15	cPCI J5 A15	40
41	cPCI J5 E14	cPCI J5 D14	42
43	cPCI J5 C14	cPCI J5 B14	44
45	cPCI J5 A14	cPCI J5 E13	46
47	cPCI J5 D13	cPCI J5 C13	48
49	cPCI J5 B13	cPCI J5 A13	50
51	cPCI J5 E12	cPCI J5 D12	52
53	cPCI J5 C12	cPCI J5 B12	54
55	cPCI J5 A12	N/C	56
57	N/C	N/C	58
59	N/C	N/C	60
61	N/C	N/C	62
63	N/C	N/C	64

 Copyright 2006, SBE, Inc.

3.5.8.2 PTMC Site B Pn4

This table shows the connections from PTMC Site B Jn4 to the Compact PCI connector J5 and, for PT5MC, the signals for the Ethernet ports, Link Ports A and B.

LPa (Link Port A) and LPb (Link Port B) for PTMC Site A go to the Ethernet Switch ports 3 and 5 respectively. See Table 14.

PT5MC cards with network connections through Pn4, *must* be transformer coupled or the link to the layer 2 switch will not be established.

Table 21. PTMC Site B Configuration #2/#5 Pn4 Connector Pin Assignment

Pn4 PT2MC			
Pin #	Signal Name	Signal Name	Pin #
1	cPCI J5 E11	cPCI J5 D11	2
3	cPCI J5 C11	cPCI J5 B11	4
5	cPCI J5 A11	cPCI J5 E10	6
7	cPCI J5 D10	cPCI J5 C10	8
9	cPCI J5 B10	cPCI J5 A10	10
11	cPCI J5 E9	cPCI J5 D9	12
13	cPCI J5 C9	cPCI J5 B9	14
15	cPCI J5 A9	cPCI J5 E8	16
17	cPCI J5 D8	cPCI J5 C8	18
19	cPCI J5 B8	cPCI J5 A8	20
21	cPCI J5 E7	cPCI J5 D7	22
23	cPCI J5 C7	cPCI J5 B7	24
25	cPCI J5 A7	cPCI J5 E6	26
27	cPCI J5 D6	cPCI J5 C6	28
29	cPCI J5 B6	cPCI J5 A6	30
31	cPCI J5 E5	cPCI J5 D5	32
33	cPCI J5 C5	cPCI J5 B5	34
35	cPCI J5 A5	cPCI J5 E4	36
37	cPCI J5 D4	cPCI J5 C4	38
39	cPCI J5 B4	cPCI J5 A4	40
41	cPCI J5 E3	cPCI J5 D3	42
43	cPCI J5 C3	cPCI J5 B3	44
45	cPCI J5 A3	cPCI J5 E2	46
47	cPCI J5 D2	cPCI J5 C2	48
49	cPCI J5 B2	cPCI J5 A2	50
51	cPCI J5 E1	cPCI J5 D1	52
53	cPCI J5 C1	cPCI J5 B1	54
55	CPCIJ5_A1	N/C	56
57	N/C	N/C	58
59	N/C	N/C	60
61	N/C	N/C	62
63	N/C	N/C	64

Pn4 PT5MC			
Pin #	Signal Name	Signal Name	Pin #
1	LPa_DA+	LPa_DC+	2
3	LPa_DA-	LPa_DC-	4
5	Ground	Ground	6
7	LPa_DB+	LPa_DD+	8
9	LPa_DB-	LPa_DD-	10
11	Ground	Ground	12
13	LPb_DA+	LPb_DC+	14
15	LPb_DA-	LPb_DC-	16
17	Ground	Ground	18
19	LPb_DB+	LPb_DD+	20
21	LPb_DB-	LPb_DD-	22
23	Ground	Ground	24
25	cPCI J5 A7	cPCI J5 E6	26
27	cPCI J5 D6	cPCI J5 C6	28
29	cPCI J5 B6	cPCI J5 A6	30
31	cPCI J5 E5	cPCI J5 D5	32
33	cPCI J5 C5	cPCI J5 B5	34
35	cPCI J5 A5	cPCI J5 E4	36
37	cPCI J5 D4	cPCI J5 C4	38
39	cPCI J5 B4	cPCI J5 A4	40
41	cPCI J5 E3	cPCI J5 D3	42
43	cPCI J5 C3	cPCI J5 B3	44
45	cPCI J5 A3	cPCI J5 E2	46
47	cPCI J5 D2	cPCI J5 C2	48
49	cPCI J5 B2	cPCI J5 A2	50
51	cPCI J5 E1	cPCI J5 D1	52
53	cPCI J5 C1	cPCI J5 B1	54
55	cPCI J5 A1	N/C	56
57	N/C	N/C	58
59	N/C	N/C	60
61	N/C	N/C	62
63	N/C	N/C	64

 Copyright 2006, SBE, Inc.

3.5.9 *PTMC Site Voltage Keying*

Voltage key posts are installed at each PTMC site in accordance with IEEE 1386. See Section 2.10.3.

The HW400c/2 local PCI bus I/O voltage is **3.3 volts only**. Therefore, **PTMC and PMC modules with 5 volt only I/O signals cannot be used** on the HW400c/2 board, and are prevented from being installed by a key post residing at each site.

3.6 IPMI System Management

The HW400c/2 board includes an IPMI controller that interfaces to the System Management Bus (SMB) as defined by the PICMG 2.9 specification. The IPMI information is only accessible through an IPMI Shelf Manager, and is used to monitor and report the health of the HW400c/2.

An IPMI Shelf manager may not be present in the system, and IPMI may, in fact, not even have power. In either case, the IPMI circuitry on board is for monitoring purposes only and, if disabled or not used, has no affect the normal operation of the HW400c/2.

3.6.1 *IPMI Controller*

The IPMI controller on the HW400c/2 is the QLogic Zircon PM with board-specific firmware. The Zircon PM complies with PICMG hot-swap requirements.

The Zircon PM communicates with the System Management device (residing on the slot 0 or other card) through its I^2C Port 0, connected through the CompactPCI J1 connector. It also connects to the Geographical Address bits from the CompactPCI J2 or J4 connector for reading the physical slot address. Figure 13 shows the major functions of the Zircon PM controller. Table 22 lists the GPIO port functions.

 Copyright 2006, SBE, Inc.

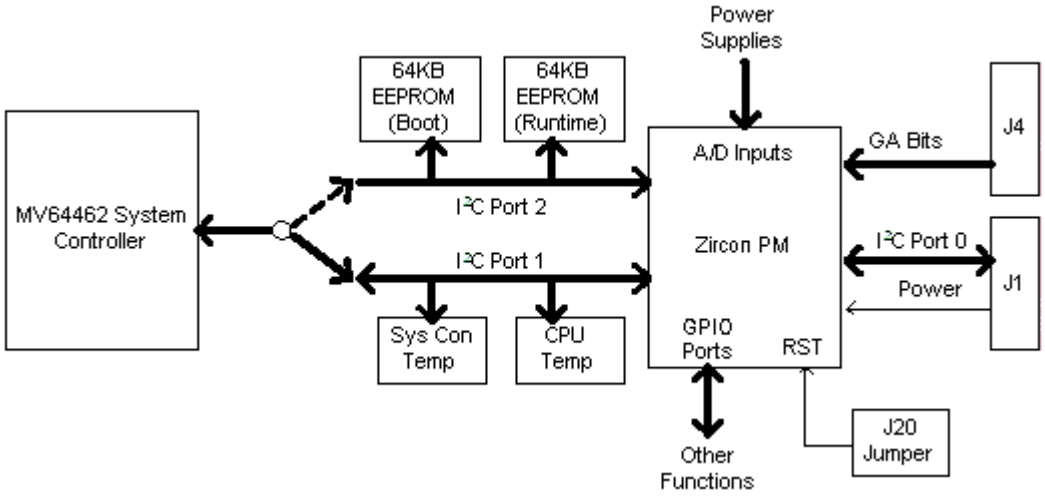

Figure 13. IPMI Block Diagram

Table 22. GPIO Port Assignments for IPMI

GPIO Port	I/O	Description
GPIO_00	Input	/PWRON monitor (active low)
GPIO_01	Input	HEALTHY monitor (active high)
GPIO_07	Output	Blue LED control (low = on, high = off)
GPIO_12	Input	Watchdog Timer Expired (active low)
GPIO_13	Output	Board Reset control (active low)
GPIO_14	Input	Ejector Latch monitor, L_STAT (low = closed, high = open)
GPIO_15 – GPIO_19	Inputs	Geographical Address bits 4 – 0
GPIO_20 – GPIO_23	Inputs	Boot Status bits 3 – 0

3.6.2 *Temperature and Voltage Monitor*

IPMI functions implemented on the HW400c/2 include board temperature sensors TS0 and TS1 connected to I^2C Port 1 on the Zircon PM. The 1.1V (MPC744X core voltage), 2.5V, 3.3V, 5V and other supply voltages are connected to A/D input ports on the Zircon PM through precision voltage-divider networks. These connections (see Table 23 and Table 24) allow remote monitoring of the temperatures and voltages on the HW400c/2 by a system management device (shelf manager).

 Copyright 2006, SBE, Inc.

Table 23. Voltage Monitor A/D Port Assignments for IPMI

Supply Voltage Monitor	A/D Port
5-Volt	A2D1
3.3-Volt	A2D2
1.1-Volt (CPU core)	A2D3
1.5-Volt (System controller core)	A2D4
2.5-Volt (SDRAM)	A2D5

Table 24. HW400c/2 Temperature Sensor Locations

Device	Location	I^2C Port 1 Address
TS0 (U84)	MV64462 System Controller	0
TS1 (U83)	CPU Internal Temperature	1

3.6.3 *Hot Swap Ejector Latch Detection*

The IPMI controller has the capability to read the state of the hot swap ejector switch, otherwise known as the L_STAT signal. This signal is connected to a GPIO pin on the Zircon PM (see Table 22). L_STAT = 0 indicates the ejector latch is closed, L_STAT = 1 indicates it is open, and that the board is about to be removed

3.6.4 *Blue (Hot Swap) LED Control*

The IPMI controller has the capability to turn on the Blue Front Panel LED. A GPIO pin on the Zircon PM is connected through the CPLD to the LED (see Table 22).

3.6.5 *Boot Status Monitor*

There are four (4) register bits in the CPLD reserved for indicating the boot status level from the processor. These bits are connected to the Zircon PM GPIO port as shown in Table 22. The power-up default value of these bits is "0000." All other values are reserved for SBE use.

 Copyright 2006, SBE, Inc.

3.6.6 *Board Reset via IPMI*

The IPMI controller has the capability to issue a board reset. A GPIO port on the Zircon PM (see Table 22) is connected to the CPLD and OR'ed with the /P_RST reset signal from the Host CompactPCI bus. A standard IPMI command is issued to initiate the board reset. IPMI commands are issued through an IPMI Shelf Manager

3.6.7 *IPMI System Power Supply*

The Vsm supply pin on the CompactPCI J1 connector delivers 5V to the IPMI circuit. The PICMG 2.9 specification sets the maximum current drawn from the Vsm pin at 100mA. The Zircon PM, together with all its supporting devices, draws about 60mA maximum continuous current. However, due to power-up inrush or a short circuit, the current could exceed 100mA. Therefore, a current-limiting switch is connected at the Vsm pin.

3.6.8 *IPMI Firmware EEPROMs*

There are two Atmel AT24C512 (64 KB) EEPROMs connected to I^2C Port 2 on the Zircon PM. The EEPROM at U90 is for storage of the runtime firmware. The EEPROM at U87 is for boot code, as well as storage of information related to Field Replaceable Units (FRU), such as serial number. These assignments are shown in Table 25.

The EEPROMs can be pre-programmed (default), or they can be programmed on-board via the MV64462 Two-Wire Serial Interface (TWSI), See Table 7.

The IPMI EEPROMs pre-programmed at the factory should always be used. Programming on board is usually unnecessary, and is recommended only for expert users, as misconfiguration could result in unpredictable behavior.

When programming the EEPROMs on-board, the Zircon PM must be held in the reset state by installing the IRST jumper on the J7 header (see Table 8). Table 25 shows the I^2C addresses of each EEPROM.

Table 25. Firmware EEPROM Addresses

EEPROM Function	EEPROM Type	I^2C Port 2 Address
Boot/FRU (U87)	AT24C512	0
Runtime (U90)	AT24C512	1

 Copyright 2006, SBE, Inc.

3.6.9 *Zircon PM Reset*

At power-up, the Zircon PM is held in reset state until the 3.3V supply voltage is within tolerance.

3.6.10 *IMPI Get Device ID*

The response to the IPMI command "GetDeviceID" from the Shelf Manager is of the standard format. See Appendix A for the complete response format to GetDeviceID." Unique Product ID numbers (byte offsets 11 and 12) are assigned as shown in Table 26

The three least significant bits of the Product ID numbers for the HW400c/2 board are always "111" to maintain continuity with the earlier HW400 Product ID assignment scheme. The LSB value is also reflected in the Extended Type Register (ETR) in the CPLD register bank. See Section 4.2.11 for details.

Table 26. Product ID number

HW400c/2 Product Features (see Table 5)	Product ID number (MSB, LSB)
Standard Version	0x00, 0x07

 Copyright 2006, SBE, Inc.

3.7 Hot Swap Support

The HW400c/2 complies with the PICMG 2.1 specification for full hot swap in CompactPCI systems as defined by the PICMG 2.1 R2.0 specification. Hot swap functions, such as power FET control, are provided by a Linear Technologies LTC1664 Hot Swap Controller.

3.7.1 *Hot Swap on J1 and J2*

All signals to and from the CompactPCI backplane connectors J1 and J2 are precharged to a voltage of 1.0V. This voltage is derived from the 3.3V early power source.

3.7.2 *Hot Swap on J3*

The Ethernet PSB signals on J3 do not require a precharge voltage for hot swap operation.

There are power pins assigned to palces that would normally be User I/O on J3 (see Section 3.4.5.1). These pins are part of “late power” and are switched on and off by the Hot Swap controller.

3.7.3 *Hot Swap on J4*

Signals to and from the J4 H.110 CT Bus connector are precharged to a voltage of 0.7V. This voltage is derived from the 3.3V early power source.

3.7.4 *Hot Swap on J5*

The J5 rear I/O signals are not bussed on the backplane. Any special hot swap considerations must be handled by the PTMC modules and/or RTM making use of the J5 rear I/O connector.

 Copyright 2006, SBE, Inc.

3.7.5 *Hot Swap Sequence*

The hot swap sequence is a coordination between the operator, the hardware on the HW400c/2 board, and the host system board that is capable of basic, full, or high-availability hot swap. Table 27 outlays the Hot Swap insertion and extraction sequences.

Table 27. Overview of Hot Swap Insertion/Extraction Sequences

Sequence Type	Sequence Process
INSERTION	When the board is inserted into the enclosure, the following occurs: 1. Hardware turns on the blue LED. 2. The L_STAT signal is forced to a high state that is sensed by the PCI bridge. 3. The PCI bridge informs the host system via the ENUM# signal to indicate that a board has been inserted. 4. The host system board initializes the HW400c/2 board and instructs the PCI bridge to turn off the blue LED. 5. The off state of the blue LED assures the operator that the board is functional.
EXTRACTION	When the board is extracted from the enclosure, the following occurs: 1. The bottom CompactPCI ejector is flipped down to start the extraction sequence. The ejector switch forces the L_STAT signal to a high state. 2. The PCI bridge senses the change in L_STAT and causes ENUM# to toggle, informing the host system board that the HW400c/2 board is about to be extracted. 3. The operator then waits for the blue LED to turn on before attempting to fully eject the HW400c/2 board. 4. The host system halts all applications associated with the HW400c/2 board that is about to be extracted. 5. The host system then instructs the PCI bridge to turn on the blue LED. 6. After the blue LED turns on, the operator can continue with the extraction of the board.

For a complete description of all hot swap functions, see the PICMG 2.1 R2.0 specification.

 Copyright 2006, SBE, Inc.

4 PROGRAMMING INFORMATION

The HW400c/2 memory map and programmable register information is provided in this section.

4.1 HW400c/2 Memory Map

Table 28 shows the memory map for the HW400c/2 board.

Table 28. HW400c/2 Memory Map

Address Start (Hex)	Address End (Hex)	Device	Device No.	Device Size	Memory Window Size
0	0FFF FFFF	SDRAM 256MB	Mem0/Mem1	256 MB	256 MB
0	1FFF FFFF	SDRAM 512MB	Mem0/Mem1	512 MB	512 MB
0	3FFF FFFF	SDRAM 1GB	Mem0/Mem1	1 GB	1 GB
0	7FFF FFFF	SDRAM 2GB	Mem0/Mem1	2 GB	2 GB
E000 0000	E000 FFFF	Disk-on-Chip	Dev 0	128MB – 8GB	64 KB
E100 0000	E100 FFFF	CPLD	Dev 1	< 100 Bytes	64 KB
E200 0000	E20F FFFF	T8110L	Dev 2		1 MB
F100 0000	F100 FFFF	MV64462 Reg			64 KB
F100 0850		MV64462 Timer			
F100 8000		MV64462 UART			
FF00 0000	FF7F FFFF	Boot Rom	Dev 3	512 KB	8 MB
FF80 0000	FFFF FFFF	Boot SRAM	Dev Boot	512 KB	8 MB

 Copyright 2006, SBE, Inc.

4.2 CPLD Registers

All CPLD (Complex Programmable Logic Device) registers are 8-bit registers that are accessible by the system controller.

1: All reserved locations and bits are set to zero after a reset to the CPLD.

2: Check individual register descriptions for default register values after reset.

Table 29. CPLD Registers

Name	Description	Offset Address (Hex)	Function
RES0-3	Reserved (Legacy HW400 Registers)	00-03	Reserved
CSR	Clock Select Register	04	Read/Write
BSR	Board Status Register	05	Read/Write
LEDA	LED Register A	06	Read/Write
MOR	Memory Option Register	07	Read Only
GAR	Geographic Addressing Register	08	Read Only
PRR	PTMC Reset Register	09	Read/Write
PCR	PTMC Control Register	0A	Read/Write
RESB-C	Reserved (Legacy HW400 Registers)	0B-0C	Reserved
BOR	Board Option Register	0D	Read Only
GPR	General Purpose Register	0E	Read/Write
PSR	PCI Status Register	0F	Read Only
ETR	Extended Type Register	10	Read Only
HRR	Hardware Revision Register	11	Read Only
PLLA	PLL Configuration Register A	12	Read Only
PLLB	PLL Configuration Register B	13	Read Only
LEDB	LED Register B	14	Read/Write
DCR	Device Control Register	15	Read/Write
CTR	CPU Timer Register	16	Read Only
WRR	Warm reset Register	17	Read/Write
RES18-19	Reserved for future use	18-19	Reserved
SPR	SPI Page Register	1A	Read/Write
SAR	SPI Address Register	1B	Read/Write
SOR	SPI Read Byte Offset Register	1C	Read/Write
RBC	Read Byte Count Register	1D	Read/Write
WBC	Write Byte Count Register	1E	Read/Write
SESR	SPI Error and Status Register	1F	Read Only
SDR	SPI Data Registers	20-27	Read/Write
EAR	EEPROM Address Register	28	Read/Write
EOSR	EEPROM Operation/Status Register	29	Read/Write
EDR	EEPROM Data Registers	2A-2B	Read/Write
RES2C-FF	Reserved for future use	2C-FF	Reserved

 Copyright 2006, SBE, Inc.

4.2.1 *Clock Select Register (CSR)*

The Clock Select Register (CSR) is a Read/Write register. This register selects whether or not the H.110 Controller (T8110L) drives the H.110 and local CT bus sync and clock. The register bit definitions are shown in Table 30.

Table 30. Clock Select Register (CSR) Offset Address 0x04

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
L_N2-SRC	L_N1-SRC	L_C8A-SRC	L_C8B-SRC	H_C8A-SRC	H_C8B-SRC	Reserved	Reserved

The backplane H.110 Bus "A" and "B" clocks can be generated by either the HW400c/2 board *or* from the H.110 backplane. Therefore, the H_C8A-SRC and H_C8B-SRC settings must match the programming of the H.110 Bus Controller (T8110L).

Alternatively, the local CT Bus "A" and "B" clocks can be enabled onto the local CT bus via the L_C8A-SRC and L_C8B-SRC bits. The T8110L LSC[3:0] pins should be programmed properly prior to enabling the clock onto the local CT bus. See Section 3.3.2 for clock routing details. L_N1-SRC and L_N2-SRC enable NETREF1 and NETREF2 onto the local CT bus.

L_N2-SRC = 0 Local CT Bus NETREF2 (PT_NETREF2) not driven by T8110L
= 1 Local CT Bus NETREF2 (PT_NETREF2) driven by T8110L

L_N1-SRC = 0 Local CT Bus NETREF1 (PT_NETREF1) not driven by T8110L
= 1 Local CT Bus NETREF1 (PT_NETREF1) driven by T8110L

L_C8A-SRC = 0 Local CT Bus "A" clocks (C8A and FRAMEA) not driven by T8110L
= 1 Local CT Bus "A" clocks (C8A and FRAMEA) are driven by T8110L

L_C8B-SRC = 0 Local CT Bus "B" clocks (C8B and FRAMEB) not driven by T8110L
= 1 Local CT Bus "B" clocks (C8B and FRAMEB) are driven by T8110L

H_C8A-SRC = 0 H.110 "A" clocks (C8A and FRAMEA) not driven by T8110L
= 1 H.110 "A" clocks (C8A and FRAMEA) are driven by T8110L

H_C8B-SRC = 0 H.110 "B" clocks (C8B and FRAMEB) not driven by T8110L
= 1 H.110 "B" clocks (C8B and FRAMEB) are driven by T8110L

 Copyright 2006, SBE, Inc.

4.2.2 *Board Status Register (BSR)*

The Board Status Register (BSR) is a Read/Write register. This register reflects the presence of the CT bus (H.110, see Section 3.3.3), the state of the FACT (Factory) jumper in J7 (see Figure 9), and can control and report the state of two of the status LEDS on the front panel (see Figure 3).

Table 31. Board Select Register (BSR) Offset Address 0x05

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CT_EN_STAT	FACT	Reserved	DARK	Reserved	Reserved	STLEDB	STLEDA
R	R	-	R/W	-	-	R/W	R/W

CT_EN_STAT = 0 H.110 present
= 1 H.110 not present

FACT = 0 Normal operation
= 1 Reserved

DARK = 0 Normal LED operation
= 1 Dark Office (all front panel LEDs turned off)

STLEDB = 0 Status LED B off
= 1 Status LED B on

STLEDA = 0 Status LED A off
= 1 Status LED A on

4.2.3 *LED Register A (LEDA)*

LED Register A (LEDA) is a Read/Write register. When the "LEDB[1:0]" bits in LED Register B (see Section 4.2.15) are set to "11", the contents of LEDA become active and drive the on-board surface-mount LEDs (near cPCI connector J5). When active, setting any of the bits to a "1" turns ON the corresponding LED.

Table 32. LED Register A (LEDA) Offset Address 0x06

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
LEDA7	LEDA6	LEDA5	LEDA4	LEDA3	LEDA2	LEDA1	LEDA0

 Copyright 2006, SBE, Inc.

4.2.4 *Memory Option Register (MOR)*

The Memory Option Register (MOR) is a Read-Only register. This register reports the presence and size of the M-Systems Disk on Chip device.

Table 33. Memory Option Register (MOR) Offset Address 0x07

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
DOC3	DOC2	DOC1	DOC0	Reserved	Reserved	Reserved	Reserved

DOC3	= 0	Disk-on-Chip de-populated
	= 1	Disk-on-Chip populated (default)
DOC[2:0]	= 000	Disk-on-Chip Size is 64 MB
	= 001	Disk-on-Chip Size is 128 MB (default)
	= 010	Disk-on-Chip Size is 256 MB
	= 011	Disk-on-Chip Size is 512 MB
	= 100	Disk-on-Chip Size is 1 GB
	= 101	Disk-on-Chip Size is 2 GB
	= 110	Disk-on-Chip Size is 4 GB
	= 111	Disk-on-Chip Size is 8 GB

4.2.5 *Geographic Addressing Register (GAR)*

The Geographic Addressing Register (GAR) is a Read Only register. This register shows the value of the Geographic Address Bits as read from the CompactPCI backplane connectors J2 and/or J4.
Geographical Addressing Bits define a physical location (slot) in the CompactPCI backplane. The settings of J2 and J4 should be identical. The reason for both connectors mirroring the bits is that in some configurations (e.g. a non-PCI backplane or a non H.110 backplane) one or the other connector may not be present. For a definition of the Geographic Address Bits, see PICMG 2.0 and PICMG 2.5.

Table 34. Geographic Addressing Register (CSR) Offset Address 0x08

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	Reserved	Reserved	GA4	GA3	GA2	GA1	GA0

GA[4:0]	=	Geographic Address Bits as read from CompactPCI J2 and/or J4 (backplane) connectors

 Copyright 2006, SBE, Inc.

4.2.6 *PTMC Reset Register (PRR)*

PTMC Reset Register (PRR) is a Read/Write register that asserts and de-asserts reset to the individual PTMC sites. The Reset pulse applied to the PTMC modules must conform to the PCI standard, that is, it must be at least 10 PCI clock cycles long.

Table 35. PTMC Reset Register (PRR) Offset Address 0x09

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	PMCRSTB	PMCRSTA	Reserved	Reserved	Reserved	Reserved	Reserved

PMCRSTB = 0 De-assert PMC Site B RESET (default state)
= 1 Assert PMC Site B RESET

PMCRSTA = 0 De-assert PMC Site A RESET (default state)
= 1 Assert PMC Site A RESET

4.2.7 *PTMC Control Register (PCR)*

The PTMC Control Register (PCR) is a Read/Write register. The interoperability of each PTMC mezzanine card can be detected by reading this register. After reading each card's PTID bits, the processor can enable the card by setting the site's PTEN bit to "1". No processor intervention is required for PTIDx[2:0] = 010 or 101, which are the codes for PT2MC and PT5MC, respectively. When either of these codes is detected by the CPLD, the PTEN bit for the site is set to "1" automatically, and the card in that site is enabled.

Table 36. PTMC Control Register (PCR) Offset Address 0x0A

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PTENB	PTIDB2	PTIDB1	PTIDB0	PTENA	PTIDA2	PTIDA1	PTIDA0
R/W	R	R	R	R/W	R	R	R

PTENB = 0 PTMC Site B Disabled
= 1 PTMC Site B Enabled

PTIDB[2:0] = 000 Site B is 32-bit PMC type, or is not present
= 010 Site B is PT2MC type
= 101 Site B is PT5MC type
= 111 Site B is 64-bit PMC type, or PT7MC type

PTENA = 0 PTMC Site A Disabled
= 1 PTMC Site A Enabled

PTIDB[2:0] = 000 Site A is 32-bit PMC type, or is not present
= 010 Site A is PT2MC type
= 101 Site A is PT5MC type
= 111 Site A is 64-bit PMC type, or PT7MC type

 Copyright 2006, SBE, Inc.

4.2.8 *Board Option Register (BOR)*

The Board Option Register (BOR) is a Read Only register. This register indicates the configuration and product type. Bit 5, bit 2, bit 1 and bit 0 are always "1" for the HW400c/2 board.

Table 37. Board Option Register (BOR) Offset Address 0x0D

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
BUSMD1B	BUSMD1A	1	Reserved	Reserved	1	1	1

BUSMD1B	= 0	PTMC Site B PCI Incapable
	= 1	PTMC Site B PCI Capable
BUSMD1A	= 0	PTMC Site A PCI Incapable
	= 1	PTMC Site A PCI Capable

4.2.9 *General Purpose Register (GPR)*

The General Purpose Register (GPR) is a Read/Write register that can be used to indicate boot status information to the IPMI controller. The HW400c/2 boot status can also be indicated by the on board surface-mount LEDs during the boot process (LEDB[1:0] = 00).

Table 38. General Purpose Register (GPR) Offset Address 0x0E

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
BTST3	BTST2	BTST1	BTST0	Reserved	Reserved	Reserved	Reserved

BTST[3:0]	= 0000	Boot status level = 0 (default)
	= 0001	Boot status level = 1
	= 0010	Boot status level = 2
	= 0011	Boot status level = 3
	= 0100	Boot status level = 4
	….	….
	= 1111	Boot status level = 15

 Copyright 2006, SBE, Inc.

4.2.10 *PCI Status Register (PSR)*

The PCI Status Register (PSR) is a Read-Only register and indicates the status of the host and local PCI buses. The bits of this register are defined as follows.

Table 39. PCI Status Register (PSR) Offset Address 0x0F

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	Reserved	Reserved	LPCI2	LPCI1	LPCI0	Reserved	NOPCI

LPCI	= 0	Local PCI Bus running in PCI mode
	= 1	Local PCI Bus running in PCI-X mode
LPCI[1:0]	= 00	Local PCI Bus running at 33 MHz
	= 01	Local PCI Bus running at 66 MHz
	= 10	Local PCI Bus running at 100 MHz
	= 11	Local PCI Bus running at 133 MHz
NOPCI	= 0	Host PCI Bus is present (cPCI backplane has PCI)
	= 1	No Host PCI bus on cPCI backplane

4.2.11 *Extended Type Register (ETR)*

The Extended Type Register (ETR) is a Read-Only register that indicates the type of board. It is only used in the case when bits 0-2 in the Board Option Register (BOR) is set to "111". The ETR[2:0] bits are permanently set to "111", while ETR[7:3] represents the board type.

Table 40. Extended Type Register (ETR) Offset Address 0x10

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
ETR7	ETR6	ETR5	ETR4	ETR3	1	1	1

ETR[7:3]	= 00000	HW400c/2 Standard Version
	= 00001	Reserved for future versions
	= 00010	Reserved for future versions

 Copyright 2006, SBE, Inc.

4.2.12 *Hardware Revision Register (HRR)*

The Hardware Revision Register (HRR) is a Read-Only register. It contains the current major and minor (optional) hardware revision for the board.

Table 41. Hardware Revision Register (HRR) Offset Address

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
HRR7	HRR6	HRR5	HRR4	HRR3	HRR2	HRR1	HRR0

HRR[7:4] = xxxx HW400c/2 Major Revision

HRR[3:0] = yyyy HW400c/2 Minor Revision

4.2.13 *PLL Configuration Register A (PLLA)*

The PLL Configuration Register A (PLLA) is a Read-Only register. It contains the settings for the CPU PLL. Reading this register (along with PLLB) can help software determine the CPU operating frequency. Please refer to either the MPC7447A or MPC7448 Hardware Specifications documents, in the PLL Configuration section, for a table of all possible values.

Table 42. PLL Configuration Register A (PLLA) Offset Address 0x12

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	Reserved	CPLL5	CPLL4	CPLL3	CPLL2	CPLL1	CPLL0

CPLL[5:0] = 0x0B Default setting for HW400c/2 Standard Version (CPU core clock is 1.0 GHz when system bus clock is 166 MHz)

 Copyright 2006, SBE, Inc.

4.2.14 *PLL Configuration Register B (PLLB)*

The PLL Configuration Register B (PLLB) is a Read-Only register. It contains the settings for the System bus and Device bus (external) PLLs. Reading this register (along with PLLA) can help software determine the CPU operating frequency, as well as the Device bus operating frequency.

Table 43. PLL Configuration Register B (PLLB) Offset Address 0x13

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	Reserved	SPLL1	SPLL2	Reserved	Reserved	DPLL1	DPLL0

SPLL[1:0]	= 00	System bus clock is 100 MHz
	= 01	System bus clock is 133 MHz
	= 10	System bus clock is 166 MHz (Default for HW400c/2 standard version)
	= 11	System bus clock is 200 MHz
DPLL[1:0]	= 00	Device bus clock is 100 MHz
	= 01	Device bus clock is 133 MHz (Default for HW400c/2 standard version)
	= 10	Reserved
	= 11	Reserved

 Copyright 2006, SBE, Inc.

4.2.15 *LED Register B (LEDB)*

The LED Register B (LEDB) is a Read/Write register. It contains controls for the eight on-board surface-mount LEDs as well as the optional LAN status LEDs.

Table 44. LED Register B (LEDB) Offset Address 0x14

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
STLEDD	STLEDC	LAN2	LAN1	LAN0	LEDB2	LEDB1	LEDB0

STLEDD	= 0	Status LED D off
	= 1	Status LED D on
STLEDC	= 0	Status LED C off
	= 1	Status LED C on
LAN[2:0]	= 000	Status LEDs C and D indicate Port 0 Status
	= 001	Status LEDs C and D indicate Port 1 Status
	= 010	Status LEDs C and D indicate Port 2 Status
	….	….
	= 111	Status LEDs C and D indicate Port 7 Status
LEDB2	= 0	Status LEDs C and D controlled by register bits STLEDC and STLEDD
	= 1	Status LEDs C and D indicate LAN Status for port defined by LAN[2:0]
LEDB[1:0]	= 00	On-Board LEDs indicate Boot Status (default)
	= 01	On-Board LEDs indicate LAN Status
	= 10	On-Board LEDs indicate BCM5388 Ethernet Switch Load Status
	= 11	On-Board LEDs controlled by LED Register A

On-Board LED (L7 – L0) functions determined by LEDB[1:0] are further explained below in Table 45.

Table 45. On-board LED functions as determined by LEDB [1:0]

LEDB [1:0]	L7	L6	L5	L4	L3	L2	L1	L0
00	BCM5388 LEDERR	ZIRC_BOOT	RESET	INITACT	BTST3	BTST2	BTST1	BTST0
01	LAN7	LAN6	LAN5	LAN4	LAN3	LAN2	LAN1	LAN0
10	LOAD7	LOAD6	LOAD5	LOAD4	LOAD3	LOAD2	LOAD1	LOAD0
11	LEDA7	LEDA6	LEDA5	LEDA4	LEDA3	LEDA2	LEDA1	LEDA0

 Copyright 2006, SBE, Inc.

4.2.16 *Device Control Register (DCR)*

The Device Control Register (DCR) is a Read/Write register, which controls the CPU timer enable and three resets.

The Reset pulse applied to any device must conform to the specifications of that particular device. Please refer to the applicable device manual for details.

Table 46. Device Control Register (CSR) Offset Address 0x15

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	Reserved	CTREN	Reserved	Reserved	DOCRST	T8110L_RST	ETHRST

CTREN	= 0	CPU Timer disabled (default state)
	= 1	CPU Timer enabled
DOCRST	= 0	De-assert Disk-on-Chip RESET (default state)
	= 1	Assert Disk-on-Chip RESET
T8110L_RST	= 0	De-assert T8110L RESET (default state)
	= 1	Assert T8110L RESET
ETHRST	= 0	De-assert Ethernet Switch & PHY RESET (default state)
	= 1	Assert Ethernet Switch & PHY RESET (minimum 5us)

4.2.17 *CPU Timer Register (CTR)*

The CPU Timer Register is a Read-Only register. It is used for measuring CPU performance. The register value increments once for each tick of the (1.5625 MHz) SPI serial clock, i.e. once every 640 ns.

The CPU Timer Register is enabled by writing a "1" to DCR bit 5 (CTREN, see Section 4.2.16). Otherwise, it is held to a count value of 0x00 when DCR bit 5 is "0.

Table 47. CPU Timer Register (CTR) Offset Address 0x16

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CTR7	CTR6	CTR5	CTR4	CTR3	CTR2	CTR1	CTR0

CTR[7:0]	= 0x00 –> 0xFF	(when DCR bit 5 = 1)
CTR[7:0]	= 0x00	(when DCR bit 5 = 0)

 Copyright 2006, SBE, Inc.

4.2.18 *Warm Reset Register (WRR)*

The Warm Reset Register is a Read/Write Register. Writing a value of 0x77 to the Warm Reset Register initializes a Warm Reset. The actual reset signal is driven by the CPLD 1-2 milliseconds after writing 0x77 to the WRR. The CPU, System Controller, CPLD registers, T8110, Disk on Chip, Ethernet Switch and PHYs, and local PCI (PCI1) are all reset. Host PCI (PCI0) reset is not affected. Writing a value other than 0x77 to the WRR has no effect, except the value is latched and readable.

Table 48. Warm Reset Register (WRR) Offset address 0x17

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
WRR7	WRR6	WRR5	WRR4	WRR3	WRR2	WRR1	WRR0

WRR[7:0]	= 0x77	Warm reset
WRR[7:0]	≠ 0x77	No effect, value is latched

4.2.19 *SPI Page Register (SPR)*

The SPI Page Register is a Read/Write register. It is used for selecting the desired page when accessing the BCM5388 Ethernet Switch SPI port.

Table 49. SPI Page Register (SPR) Offset Address 0x1A

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
SPR7	SPR6	SPR5	SPR4	SPR3	SPR2	SPR1	SPR0

SPR[7:0] = 0x00 – 0xFF

4.2.20 *SPI Address Register (SAR)*

The SPI Address Register is a Read/Write register. It is used for selecting the desired register address (within each page) when accessing the BCM5388 Ethernet Switch SPI port.

Table 50. SPI Address Register (SAR) Offset Address 0x1B

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
SAR7	SAR6	SAR5	SAR4	SAR3	SAR2	SAR1	SAR0

SPR[7:0] = 0x00 – 0xFF

 Copyright 2006, SBE, Inc.

4.2.21 *SPI Read Byte Offset Register (SOR)*

The SPI Byte Offset Select Register is a Read/Write register. It is used for selecting the desired byte offset (within the register selected by the SAR) when reading from the BCM5388 Ethernet Switch SPI port. In the case where the entire register is not being read, the SOR can be set to a non-zero value to index to the desired starting byte.

Table 51. SPI Read Byte Offset Select Register (SOR) Offset Address 0x1C

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	Reserved	Reserved	Reserved	Reserved	SOR2	SOR1	SOR0

SOR[2:0]	= 000	No byte offset (Select 1st byte)
	= 001	Select 2nd byte
	= 010	Select 3rd byte
	….	….
	= 111	Select 8th byte

4.2.22 *Read Byte Count Register (RBC)*

The Read Byte Count Register is a Read/Write register. It is used for setting the number of bytes to be read when reading from the BCM5388 SPI port. When this register is written, the internal SPI Read State Machine is initiated. After all requested bytes are read from the BCM5388, the RBC value is cleared.

Table 52. Read Byte Count Register (RBC) Offset Address 0x1D

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	Reserved	Reserved	Reserved	RBC3	RBC2	RBC1	RBC0

RBC[3:0]	= 0x1 – 0x8	Read from one to eight bytes from the BCM5388

 Copyright 2006, SBE, Inc.

4.2.23 *Write Byte Count Register (WBC)*

The Write Byte Count Register is a Read/Write register. It is used for setting the number of bytes to be written when writing to the BCM5388 SPI port.

All bytes in a given register must be written; for example, if the register to be written contains 3 bytes, then WBC[3:0] must be set to 0011. When this register is written, the internal SPI Write State Machine is initiated. After all bytes are written to the BCM5388 register, the WBC value is cleared.

Table 53. Write Byte Count Register (WBC) Offset Address 0x1E

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	Reserved	Reserved	Reserved	WBC3	WBC2	WBC1	WBC0

WBC[3:0] = 0x1 – 0x8 Write from one to eight bytes from the BCM5388

4.2.24 *SPI Data Registers (SDR0 – SDR7)*

The SPI Data Registers are Read/Write registers. They are used for holding data bytes to be read from or written to the BCM5388 SPI port.

Written values cannot be read back. They are written to the BCM5388 during an SPI write operation. Similarly, read values are not affected by writes. They are read from the BCM5388 after an SPI read operation, and remain until the next operation.

In the case of a single-byte read or write, only SDR0 (offset 0x20) is used. In the case of a multi-byte read or write, SDR0 is the least significant data byte (LSB) and the remaining one to seven bytes are written to SDR1- SDR7 (last byte is MSB - up to eight bytes total).

Table 54. SPI Data Registers (SDRn) Offset Address 0x20-0x27

Register	Offset	Byte
SDR0	0x20	LSB
SDR1	0x21	MSB (2-byte register)
SDR2	0x22	MSB (3-byte register)
SDR3	0x23	MSB (4-byte register)
SDR4	0x24	MSB (5-byte register)
SDR5	0x25	MSB (6-byte register)
SDR6	0x26	MSB (7-byte register)
SDR7	0x27	MSB (8-byte register)

 Copyright 2006, SBE, Inc.

4.2.25 *SPI Error and Status Register (SESR)*

The SPI Error Register is a Read Only register. SBSY clears when the previous operation is completed, and the SPIFER, RACKER, and BYTER error flags clear when the next operation is started.

SBSY can be polled immediately after writing to the RBC or WBC registers. SPIFER, RACKER and BYTER are valid after SBSY=0 (Interface Ready), but are cleared when writing to the RBC or WBC registers for the next operation.

Table 55. SPI Error and Status Register (SESR) Offset Address 0x1F

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Reserved	Reserved	Reserved	Reserved	BYTER	RACKER	SPIFER	SBSY

SBSY	= 0	SPI Interface ready for read/write operation
	= 1	SPI Interface busy; operation in progress
SPIFER	= 0	SPIF Check passed
	= 1	SPIF Check failed; no operation performed
RACKER	= 0	RACK Check passed
	= 1	RACK Check failed; no operation performed
BYTER	= 0	Byte count was OK
	= 1	Byte count was zero; no operation performed

4.2.26 *EEPROM Address Register (EAR)*

The EEPROM Address Register is a Read/Write register. It is used for selecting the desired (16-bit word) address when accessing the serial EEPROM.

Table 56. EEPROM Address Register (EAR) Offset Address 0x28

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
EAR7	EAR6	EAR5	EAR4	EAR3	EAR2	EAR1	EAR0

EAR[7:0] = 0x00 – 0xFF (Word Address)

 Copyright 2006, SBE, Inc.

4.2.27 *EEPROM Operation/Status Register (EOSR)*

The EEPROM Operation and Status Register is a Read/Write register. It is used for initiating a read or write operation to the EEPROM, and checking the programming status after a write operation.

Bits 0-3 are self-clearing, and bit 7 clears when the next operation is started.

Attempting to write EEPROM word addresses 0x00-0x0F without the FAC jumper installed results in a write error, setting WERR bit. These addresses are reserved for SBE board ID identification and are programmed by SBE during board manufacturing.

Table 57. EEPROM Operation/Status Register (EOSR) Offset Address 0x29

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
WERR	Reserved	Reserved	EBSY	ERD	EWDS	EWR	EWEN
R	R	R	R	W	W	W	W

EWEN: Writing a “1” to this bit initiates a EWEN cycle, required before a write.

EWR: Writing a “1” to this bit initiates a write, using the EAR address and EDR data.

EWDS: Writing a “1” to this bit initiates a EWDS cycle, required after a write.

ERD: Writing a “1” to this bit initiates a read, using the EAR address and EDR data.

EBSY = 0 EEPROM is ready for next write operation
= 1 EEPROM is busy writing (no reads or writes allowed)

WERR = 0 Write operation completed successfully
= 1 Write error, operation not completed

For more information on the serial EEPROM, consult the device data sheets. Devices supported include Atmel AT93C66A, Microchip 93LC66C, and ST Microelectronics M93C66.

 Copyright 2006, SBE, Inc.

4.2.28 *EEPROM Data Registers (EDR0 – EDR1)*

The EEPROM Data Registers are Read/Write registers. They are used for holding data bytes to be read from or written to the serial EEPROM.

Values written to EDR0-1 are stored in an internal shift register and cannot be read back by reading EDR0-1. They are written to the EEPROM during a write operation. Reading EDR0-1 returns serial data obtained from the most recent EEPROM ERD operation.

All read/write operations are 2-bytes, since the EEPROM is organized in a x16 format. EDR0 is the least significant data byte (LSB) and EDR1 is the most significant data byte (MSB).

Table 58. EEPROM Data Registers (EDRn) Offset Address 0x2A-0x2B

Register	Offset	Byte
EDR0	0x2A	LSB
EDR1	0x2B	MSB

4.3 Accessing the Serial EEPROM

The serial EEPROM (Atmel AT93C66A and other manufacturers) is organized with 256 words of 2 bytes each. One word address is accessed per operation using the CPLD state machine.

4.3.1 *Reading an EEPROM Address*

A. Set to EEPROM Address Register (EAR, see Section 4.2.25) to the desired word address.

B. Check the EBSY flag in the EEPROM Operation/Status Register (EOSR, see Section 4.2.26). If set to “0”, proceed to the next step.

C. Write a “0x08” to the EOSR. This starts the read operation, which typically takes 35 us to complete.

D. Check the EBSY flag. If set to “0”, the data is ready – proceed to the next step.

E. Read the data bytes from the EEPROM Data Registers EDR0 (LSB) and EDR1 (MSB). See section 4.2.27 for the register description.

 Copyright 2006, SBE, Inc.

4.3.2 *Writing an EEPROM Address*

A. Check the EBSY flag in the EEPROM Operation/Status Register (EOSR, see Section 4.2.26). If set to "0", proceed to the next step.

B. Write a "0x01" to the EOSR. This starts the Write Enable operation (EWEN).

C. Check the EBSY flag. If set to "0", EWEN is complete – proceed to the next step.

D. Set the EEPROM Address Register (EAR, see Section 4.2.25) to the desired word address.

E. Write data bytes to the EEPROM Data Registers EDR0 (LSB) and EDR1 (MSB).

F. Write a "0x02" to the EOSR. This starts the write operation, which typically takes 3 ms to complete.

G. Check the EBSY flag. If set to "0", proceed to the next step.

H. Check the WERR flag. If set to "0", the write was successful. Otherwise, a write protect or other error prevented the write operation from completing.

I. If writing more data, repeat steps [D] through [H]. If finished writing, proceed to the next step.

J. Write a "0x04" to the EOSR. This starts the Write Disable operation (EWDS).

4.4 Accessing the SPI Interface

This is a description of the interface in the CPLD on the HW400c/2 board for accessing the read and write registers of the BCM5388 Ethernet switch. The CPLD acts as a simplified wrapper for customer and test access to the complex, multi-state serial SPI interface of the Ethernet switch. The switch has up to 255 pages of registers and up to 255 registers per page. The registers vary in length from 1 to 8 bytes, and are byte addressed

4.4.1 *Registers in the CPLD*

Refer to Sections 4.2.18 to 4.2.24 for CPLD register details. These are the registers within the CPLD used to access the registers of the BCM5388 Ethernet switch. (These are NOT the Ethernet switch registers. See the BCM5388 User Guide for full description, page addresses, register addresses and byte lengths of each of its registers).

4.4.2 *BCM5388 Registers Access Rules*

There are a few rules for accessing the BCM5388 registers that must be followed for successful reads and writes. For writes, the exact register size must be written to the WBC register, or the write operation will not be completed. For reads, setting the

 Copyright 2006, SBE, Inc.

RBC to a size that exceeds the actual register size will result in an incorrect read value.

No error flags will be set to indicate these types of errors.

When reading or writing the BCM5388 registers, ensure that the register size values are in strict accordance with the BCM5388 data sheet.

4.4.3 *Reading BCM5388 Register*

A. Check the SBSY flag in the SPI Error and Status Register, bit 0 (SESR, see Section 4.2.24). If set to "0", proceed to the next step.

B. Set the SPI Page Register (SPR, see Section 4.2.18) to the desired register page of the Ethernet switch.

C. Set the SPI Address Register (SAR, see Section 4.2.19) to the desired register base byte address within the selected page.

D. Set the SPI Read Byte Address Offset Register (SOR, see Section 4.2.20) to the first byte to be read of the Ethernet switch register:
'0' for the first byte, bits 0-7 (LSB) of the register
'1' for the 2nd byte, bits 8-15, and so on.

E. Set the Read Byte Count Register (RBC, see Section 4.2.21) to the count of bytes to read. This step initiates reading from the switch to the CPLD.

An incorrect read value will result if this count exceeds the size of the Ethernet switch register. There are no error flags to indicate this type of error.

F. Poll the SBSY flag until it equals "0".

G. Check the SESR for any error flags. If no errors, proceed to the next step.

H. Read each byte out of the SPI Data Registers (SDR0-7, see Section 4.2.23). The first byte is LSB.

4.4.4 *Writing a BCM5388 Register*

A. Check the SBSY flag in the SPI Error and Status Register, bit 0 (SESR, see Section 4.2.24). If set to "0", proceed to the next step.

B. Set the SPI Page Register (SPR, see Section 4.2.18) to the desired register page of the Ethernet switch.

C. Set the SPI Address Register (SAR, see Section 4.2.20) to the desired register base byte address within the selected page. (There is no byte offset for writing.)

 Copyright 2006, SBE, Inc.

D. Write the bytes to be written into the SPI Data Registers (SDR0-7, see Section 4.2.24), beginning with LSB in SDR0.

E. Set the Write Byte Count Register (WBC, see Section 4.2.23) to the count of bytes to write. This step initiates writing to the Ethernet switch.

The register will *not* be written if this count differs from the size of the Ethernet switch register. There are no error flags to indicate this type of error.

F. Poll the SBSY flag until it equals “0”.

G. Check the SESR for any error flags. If no errors, the operation is complete.

 Copyright 2006, SBE, Inc.

5 LINUX ON THE HW400C/2 AND HOST SYSTEM

The HW400c/2 uses an off the shelf 2.6.9 PPC Linux kernel distribution from Gentoo (www.gentoo.org) with some additional files added specific to the HW400c/2, and with the GenericHDLC WAN stack enabled. The Gentoo Linux kernel may be delivered as a generic compressed archive that can be downloaded, or on a CD-ROM available from SBE. The compressed image is the tar gzip (.tgz) format, the form typically used for software obtained from the SBE website at http://www.sbei.com. To summarize, the Linux kernel for the HW400c/2 is installed on a host system that also runs Linux. See Figure 14. The root file system for the HW400c/2 is installed on the host system in the `/opt/gentoo/` directory and must be made available to the HW400c/2 board via NFS. After correctly configuring the network interface on the HW400c/2 with U-boot (the Boot ROM program), the Gentoo Linux kernel is downloaded to the HW400c/2 board using tftp. You can then boot the Linux kernel, which mounts the NFS root file system. The PPC version of the Gentoo Linux distribution contains the necessary PPC architecture to allow the kernel and all drivers to be compiled natively on the HW400c/2, eliminating the need to for a cross-compile development environment on the host system.
The next few sections list the requirements and explains the processes required for installing Gentoo Linux for the SBE HighWire 400c/2 on a host Linux system. Section 5.5 explains how to configure your HW400c/2 and how to boot the Linux kernel.

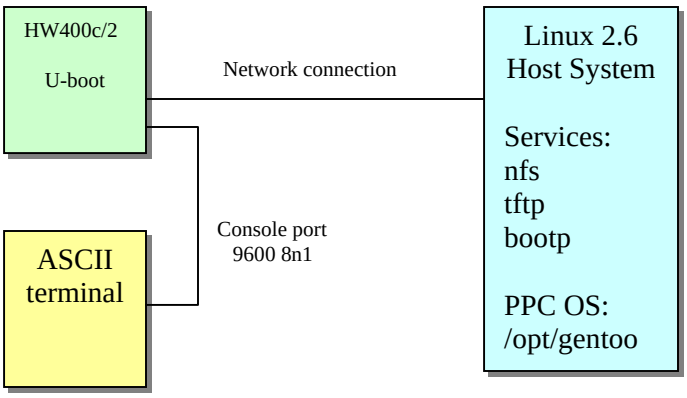

Figure 14. HW400c/2 Network and System environment

5.1 Host Hardware and Software Requirements

In order to install Gentoo Linux as a development environment on a host Linux system, the host system must satisfy the following minimum requirements:

- Intel Pentium or compatible processor
- 64 Mbytes (or better) RAM
- 750 Mbytes available disk space
- Ethernet

 Copyright 2006, SBE, Inc.

- Recent distribution of Linux installed. Because Gentoo Linux is based on the 2.6 series Linux kernel, it is best to use Gentoo Linux in conjunction with a host that has a Linux distribution based on the 2.6 kernel.

5.2 Network and System Configuration

Booting Linux on the HW400c/2 requires services that are traditionally installed as part of a server or development Linux installation. If you are putting together a development system that you will use to host one or more HW400c/2s and your desktop Linux distribution supports a *server*-class installation, we suggest that you use this installation class.
If your desktop Linux system includes a firewall, you might find that it is pre-configured to suppress many of the types of communications (FTP, TFTP, DHCP, NFS, etc.) that the HW400/c2 requires in order to boot. If you cannot successfully boot your board using the instructions provided in this section because the board cannot communicate with the system on which you installed the Gentoo Linux distribution, make sure that you have either disabled any default firewall installation, or that you have at least enabled the specific services necessary to boot Linux as described in this chapter.

5.3 Installing Linux on your host system

For simplicity, the following instructions assume that you are installing from a downloaded copy Gentoo Linux for the SBE HW400c/2 from SBE's ftp archive. Copy the archive file to `/opt` and uncompress it. You should use the following commands to uncompress the archive and extract its contents:

```
# tar -zxvf <downloaded_file>

# cd <extracted_directory>
```

Once extracted, you will find a complete Gentoo PPC Linux source code distribution under `/opt/gentoo`. This file system will be used to create the downloadable kernel image for the HW400c/2.

The version of Gentoo from www.gentoo.org does *not* have the extra files needed for operation on the HW400c/2. The Gentoo Linux distribution for the HW400c/2 be obtained from SBE.

You must have *root* privileges to install the Gentoo Linux distribution. All of the examples in this section show the standard prompt for the root user, #. You should not type the # character when entering the commands described in this section. Before installing the Linux kernel you should read any available Release Notes.

 Copyright 2006, SBE, Inc.

5.4 Configuring the Host System

The next few sections describe daemons and system services that must be installed and correctly activated in order to boot the Linux kernel on the HW400c/2 and subsequently compile applications for the HW400c/2.

5.4.1 *Modifying the Host Path*

Since all software is compiled natively on the HW400c/2, there is no need to modify the host's path.

5.4.2 *Configuring the Host NFS Server*

The Linux kernel is a ready-to-run root file system for your target architecture, enabling you to boot your target embedded system over the network using the exported file system as the target's root file system. Although you might eventually want to use a small, specific root file system as an initial disk-on-chip image for your final product, having access to a complete Linux distribution and tool set for your target system provides you with access to a wide range of Linux software for testing and debugging purposes.
To export the root file system, you will need to edit the `/etc/exports` file on your host machine, adding an entry for that file system that looks something like the following:

```
#  /opt/gentoo 10.0.0.10(rw,no_root_squash)
```

This entry consists of two fields:

- The full pathname of the directory being exported by the host system as the root file system for the target system
- Access information for the exported file system. This consists of the IP address of the system that you want to be able to access the exported file system, followed by a description of the type of access that the target system will have to the exported file system, enclosed within parentheses.

The IP address of the target system depends on the IP address that is assign to the HW400c/2 board. The value shown in the previous example is a commonly used non-routable IP address, and is the IP address used in the examples in this section. You should specify the IP address that you have assigned to your HW400c/2 board, or you can simply enter a ***** in order to grant access to the exported file system to any host.

Using * to specify the IP addresses of hosts permitted to access an exported file system is extremely insecure and should only be done if you are on a trusted, private, non-routable network and the system exporting the file system is not exposed to the Internet.

 Copyright 2006, SBE, Inc.

The parenthesized access privilege values shown in the previous example should be sufficient. These access privileges specify that the target system at the specified IP address will have *read/write* access to the exported file system, and that the user ID (UID) of the root user on the target system will not be prevented from writing or modifying files in the NFS mounted file system.

After adding appropriate entries to the `/etc/exports` file on the host system, you will then need to restart (or start) the NFS daemon on your host system, which can usually be accomplished by using the following commands:

```
# /etc/rc.d/init.d/nfslock restart

# /etc/rc.d/init.d/nfs stop

# /etc/rc.d/init.d/nfs start
```

You should separately start and stop the NFS service rather than simply restarting it because the `nfs restart` only restarts the `rpc.mountd` wrapper service, rather than the `mountd` and `nfsd` daemons.

The commands shown in the previous listing are for a Red Hat Linux system running on the Host. If you are using another Linux distribution such as Mandrake, Debian, or others, the commands to start, stop, or restart the NFS lock and mount daemons may be different.

For more information about NFS, see the following:

- The NFS FAQ at http://nfs.sourceforge.net/
- The NFS HOWTO at http://nfs.sourceforge.net/nfs-howto/

5.4.3 *Configuring Host tftp services*

One of the ways the SBE HW400c/2 boots is by using the Trivial File Transfer Protocol (TFTP) to download a kernel image to the board. This requires that a TFTP server be available on the system on which you are hosting the Gentoo Linux kernel. On most modern Linux systems, the TFTP server is installed as a part of a network-capable system installation, but is usually deactivated. This section explains how to activate the TFTP server on your Linux system and how to copy the Gentoo Linux kernel into the area from which the TFTP server can deliver the kernel to the HW400c/2.

If a TFTP server is not available on your Linux distribution or installed system, you can obtain a binary version for most Linux distributions from http://www.rpmfind.net/ by searching for the string *tftpd*.

Before configuring the TFTP daemon itself, make sure that the entries for the TFTP protocol are not commented out in the `/etc/services` file. This file is typically consulted by each network service in order to determine the network ports that it should use. You must be root to edit this file. Entries in this file are commented out if they are preceded with a hash-mark (#) in the file - to activate them, use your favorite

text editor to remove the hash mark on each line that contains the string *tftp*. Active TFTP entries in `/etc/services` should look like the following:

```
tftp 69/tcp
tftp 69/udp
```

Depending on the Linux distribution and version you are using on the host, Linux systems typically use one of two mechanisms to activate and manage network servers such as TFTP servers. These are the Extended Internet Services Daemon, `xinetd`, and the older Internet Services Dameon, `inetd`. Both the `xinetd` and `inetd` manage a variety of network services by monitoring various network ports and starting the appropriate daemon in response to a valid request. The `xinetd` is the more modern of these two mechanisms, and is generally viewed as being more secure than the older `inetd`.
To determine which of these mechanisms your system uses to manage Internet services, you can use the system's `ps` (process status) command, as in the following example:

```
# ps alxww | grep inet
5 0 2486  1      16  0  2844  872 -      Ss   ?      0:00 xinetd .. .
4 0 13205 13183  17  0  5472  668 pipe_w S+   pts/6  0:00 grep inet
```

This example shows that the system is using the `xinetd` server to manage Internet services. In this case, you should follow the instructions in Section 5.4.5. If the output from this command on your system shows that it is running the `inetd`, proceed to the next section, Section 5.4.4.

5.4.4 *Configuring tftp with inetd*

The servers that can be managed by the `inetd` are listed in the file `/etc/inetd.conf`. Each line in this file contains the entry for a specific server. To enable the TFTP server, edit the file `/etc/inetd.conf` as the root user on your system, and locate the line that looks like the following:

```
#tftp dgram udp wait root /usr/sbin/tcpd in.tftpd
```

Uncomment (remove the hash mark) from the beginning of this line, save the modified file, and exit the editor.
Add the option and value `-s /tftpboot` to the end of this line. This specifies the directory in which the TFTP server will look for files. This is the directory in which you will put the compiled Gentoo Linux kernel image (*uImage*) that the SBE HighWire HW400c/2 will download and boot.
Next, force the `inetd` to reread its configuration file. Because all Linux distributions use different mechanisms for starting and stoppping system processes, the easiest way to do this is to send the HUP signal to the running `inetd` process. To do this, you must first locate the process ID of the `inetd` process that is currently running on your system using the `ps` (process status) command, as in the following example:

 Copyright 2006, SBE, Inc.

```
# ps alxww | grep inet
140 0   578   1     0  0 1152 356 do_select S ? 0:00 inetd
0   500 13361 13336 18 0 1360 508 pipe_read S ? 0:00 grep -i inet
```

The `alxww` options to `ps` cause the command to display all system processes in an extremely wide listing. The `grep` then searches for the string *inet* in the resulting output. Each line of the output from the command shown in this example therefore displays information about a running command whose name or arguments contain the string *inet*. Of these, the first is the actual `inetd` process, and the third whitespace-separated field in this output is its *process ID* (578 in this example), which is the information that you will need to restart the process.
After collecting this information, you can cause the `inetd` process to reread its configuration file by executing a command like the following:

```
# kill -HUP 578
```

After executing this command, the TFTP server will be started on your system in response to incoming TFTP requests.

If the system is running a Linux distribution such as Red Hat Linux that starts and stops system processes using **rc** scripts, you may simply restart the inetd by invoking these scripts in the following way:

```
# /etc/rc.d/init.d/inet restart
```

This command will stop and then restart all of the Internet services on the Linux system. You may not want to do this if your system is running Internet services on which other systems depend, as it will cause a slight interruption in those services.

The final step in configuring the TFTP server on the host Linux system is to copy the Gentoo Linux kernel that the SBE HighWire HW400c/2 will download and boot from into the `/tftpboot` directory so that the board can access it:

- If the `/tftpboot` directory does not already exist, create it as the root user on the host system with the `mkdir /tftpboot` command.

  ```
  # mkdir /tftpboot
  ```

- Copy the compiled Gentoo Linux kernel file, `uImage,` into the `/tftpboot` directory from the top level of the directory structure that was created when unpacking the files of the downloaded Gentoo Linux archive.

  ```
  # cp /opt/gentoo/usr/src/linux/arch/ppc/boot/images/uImage\
  /tftpboot/.
  ```

You can now proceed to the Section 5.4.6 to set up communications with your SBE HW400c/2 board to download and boot Gentoo Linux.

 Copyright 2006, SBE, Inc.

5.4.5 *Configuring tftp with xinetd*

The servers that can be managed by the `xinetd` are each listed in a server-specific configuration file located in the directory `/etc/xinetd.d`. The file for the TFTP server is aptly named `tftp`, and looks like the following:

```
# default: off
# description: The tftp server serves files using the Trivial File Transfer \
# Protocol. The tftp protocol is often used to boot diskless \
# workstations, download configuration files to network-aware printers, \
# and to start the installation process for some operating systems.

service tftp
{
        disable                 = no
        socket_type             = dgram
        protocol                = udp
        wait                    = yes
        user                    = root
        server                  = /usr/sbin/in.tftpd
        server_args             = -s /tftpboot
        per_source              = 11
        cps                     = 100 2
        flags                   = IPv4
}
```

To enable the TFTP server, edit this file (as root), changing the line that reads `disable = yes` so that it reads `disable = no`.
Next, force the `xinetd` to reread its configuration files. Because all Linux distributions use different mechanisms for starting and stopping system processes, the easiest way to do this is to send the `HUP` signal to the running `xinetd` process. To do this, you must first locate the process ID of the `xinetd` process that is currently running on your system using the `ps` (process status) command, as in the following example:

```
# ps -eal | grep xinet

5 S   0  2292  1  0  76  0 -  946 -  ?  00:00:00 xinetd
```

The example line shows the `xinetd` process ID number, in the fourth whitespace-separated field (`2292` in this example), which is the information that you will need to restart the process. After collecting this information, you can cause the `xinetd` process to reread its configuration files by executing a command like the following:

```
# kill -HUP 2292
```

After executing this command, the TFTP server will be started on your system in response to incoming TFTP requests.

If your system is running a Linux distribution such as Red Hat Linux that starts and stops system processes using **rc** scripts, you can simply restart the xinetd by invoking these scripts in the following way:

```
# /etc/rc.d/init.d/xinetd stop
```

Then;

```
# /etc/rc.d/init.d/xinetd start
```

 Copyright 2006, SBE, Inc.

This command will stop and then start all of the Internet services on your Linux system. You may not want to do this if your system is running Internet services on which other systems depend, as it will cause a slight interruption in those services.

The final step in configuring the TFTP server on your Linux system is to copy the compiled Gentoo Linux kernel image `uImage`, into the `/tftpboot` directory so that the HW400c/2 can download it and boot:

- If the `/tftpboot` directory does not already exist, create it (as root) on your system using the `mkdir` command:

  ```
  # mkdir /tftpboot
  ```

- Copy the compiled Gentoo Linux kernel, `uImage,` into the `/tftpboot` directory from top level of the directory structure that was created when you unpacked the files in the downloaded SBE Gentoo Linux archive.

  ```
  # cp
  /opt/gentoo/usr/src/linux/arch/ppc/boot/images/uIma
  ge/tftpboot/.
  ```

You can now proceed to Section 5.4.6 to set up communications with your SBE HighWire HW400c/2 board and download and boot the Linux kernel.

5.4.6 *Configuring a bootp Server*

If you are not assigning a static IP address to be stored in the HW400c/2 non-volatile memory, it is necessary to configure a bootp server. Bootp (a precursor to DHCP) will assign an IP address to a device with a specific MAC address based on what is found in a look up table called `bootptab`. At power up, the HW400c/2 will broadcast a BOOTP_REQUEST over the network. If a server is actively running *bootpd*, that server will look through its bootptab for a matching MAC address. If a matching MAC address is found, the server will send a BOOTP_REPLY to the HW400c/2's MAC address and assign the IP address found in the bootptab file.

A bootp server has two prerequisites; an actively running bootp daemon, *bootpd*, and a bootp look up table, *bootptab.* To check if bootpd is running on your system, enter:

```
ps-eaf |grep bootpd
```

If `bootpd` is running, you should see something similar to the following;

```
root     15278 25183  0  2005 pts/1    00:00:18 bootpd -d 4 -s
root     20587 20484  0 15:27 pts/8    00:00:00 grep bootpd
```

If you don't already have one, the easiest way to create a bootp server is to have it reside on the same LAN subnet as the HW400c/2. Creating bootp relay agents for bootp servers on different LAN segments is beyond the scope of this document.

To set up a server with BOOTP with TFTP ability in a standard Linux box, uncomment (or add) these two lines in inetd.conf)

```
tftp    dgram   udp     wait    root    /usr/sbin/tcpd  in.tftpd
bootps  dgram   udp     wait    root    /usr/sbin/tcpd  bootpd -d 4
```

You may also run bootpd from the command line by entering;

```
bootpd –i –d 4
```

See the man page `bootpd(8)` for details. To run bootpd from the command line it will be necessary to disable the bootpd service if it has already been enabled and running through some other mechanism.

If one does not already exist, it will be necessary to create a bootp table, `bootptab`, in the `/etc` directory. See the man page `bootptab(5)`, and the example below.

Example `/etc/bootptab`

```
.default:\
        :hd=/usr/boot:bf=null:\
        :ds=10.0.0.200:\
        :sm=255.255.255.0:\
        :gw=10.0.0.2:\
        :hn:
johnboy:ht=1:ha=00a0d6123456:ip=10.0.100.2:ef=:bf=uImage:gw=10.0.0.120
borgus:ht=1:ha=000012342222:ip=10.0.100.3:ef=:bf=uImage:gw=10.0.0.120
neumann:ht=1:ha=000012343333:ip=10.0.100.4:ef=:bf=uImage:gw=10.0.0.120
```

5.5 Booting the HW400c/2

There are three ways to boot the Linux OS on the HW400c/2,

- Download a tftp image with bootp
- Download a tftp image with a static IP address
- Boot a kernel from the on board Disk on Chip

This section describes the processes necessary to boot using each of the three methods. In each case, the boot firmware U-boot, loaded in on-board flash, is necessary to initialize the HW400c/2. The boot instructions for three methods mentioned above diverge slightly from that point.

 Copyright 2006, SBE, Inc.

5.5.1 *U-boot, Universal Bootloader*

The HW400c/2 uses a boot ROM based on *Das U-boot*. U-boot (Universal Bootloader) is an off-the-shelf freeware package found on Sourceforge.net. Many commands and environment variables are available in U-boot to facilitate the loading of the Linux kernel from various locations.

5.5.1.1 U-boot commands

There are four basic U-boot commands that are used to configure the environment variables for the boot environment. All commands are available at the `debug>` prompt. A complete list of U-boot environment variables can be found in Appendix B .

`help` List all commands and environment variables

`printenv` Print a list of all valid environment variables that are currently in use. This command can be shortened to `print`.

In the `printenv` command, Parameters that are not set (unused), have no value assigned, or an incorrect value, will *not* be displayed.

`setenv <variable_name> <value>`
Set an environment *variable_name* to *value*. Can be shortened to `set`.

`saveenv` Save environment variable(s) to non-volatile memory. Can be shortened to `save`.

 Copyright 2006, SBE, Inc.

5.5.1.2 U-boot environment variables

U-boot has large number of environment variables and commands. While most can be used with the HW400c/2, only a few are necessary for the boot process. A complete list of U-boot environment variables can be found in Appendix B .

List of basic boot variables:

`bootargs` Boot arguments. Arguments passed to the kernel. Configures the HW400c/2 console (debug) port for the Linux kernel, the location of the IP address, if not static, the NFS device, and the NFS root path. Multiple bootargs need only be separated by a space (see Section 5.5.2.1). Sample bootargs;

`console=ttyMM0,9600n8`	Console port configuration for the Linux kernel. Console tty is ttyMM0, 9600 baud, 8 bits, no parity.

1. Without the `console` bootarg, most of the Linux boot messages will not be displayed.
2. bootarg lines of around 250 characters can be executed, however, *storing* the bootargs in flash memory is limited to 80 characters. See Table 10. If you need extra room for bootargs, please call SBE Technical Support.

`ip=bootp`	If bootp is used, get the IP address from there. Other settings apply. See section 5.5.2.2 for setting static IP addresses
`nfsroot=/opt/gentoo`	NFS root file path.
`root=/dev/nfs rw`	NFS root device.

`bootfile` The name of the bootfile, e.g. `uImage`

`bootcmd` Boot commands executed during automatic boot (autoboot). Multiple commands must be separated by a semi colon followed by a space, followed by the next command.

The semi colon *must* be backslash escaped or the second command will not be recorded. Example;

```
# set bootcmd tftpboot\; bootm
```

`bootdelay` The delay time in seconds until autoboot (executes `bootcmd`) begins. A countdown is displayed on the command line. Any

 Copyright 2006, SBE, Inc.

keystroke will stop the countdown and drop into the U-boot debug shell.

`baudrate` Baud rate of the HW400c/2 console (debug) port

`ethaddr` This unit's MAC address.

The MAC address is assigned by SBE at the time of manufacture, stored in non-volatile memory, and must not be altered. Any attempt to change the MAC address will be ignored.

`ipaddr` This unit's static IP address (if used) in dot notation. If not used, should be set to 0.0.0.0 for clarification. When using `bootp`, this address is ignored.

`serverip` The tftp server's IP address in dot notation. If not used, should be set to 0.0.0.0 for clarification. When using `bootp`, this address is ignored.

`gatewayip` The gateway system's IP address in dot notation. If not used, should be set to 0.0.0.0 for clarification. When using `bootp`, this address is ignored.

`netmask` This unit's netmask in dot notation. If not used, should be set to 0.0.0.0 for clarification. When using `bootp`, the mask is ignored.

Fixed environment variables.

These variables will be displayed and cannot be changed.

`stdin` Source of the HW400c/2's standard input (keyboard). Default=`serial` (debug port).

`stdout` Destination of the HW400c/2's standard output (terminal screen). Default= Cannot be deleted (debug port).

`stderr` Destination of the HW400c/2's standard error (console error messages). Default=`serial` (debug port).

`ethact` Active MAC port. Default=`mv_eth0`

 Copyright 2006, SBE, Inc.

5.5.1.3 Power up call trace

For reference purposes, this is a summary of the power up calls after U-boot runs and jumps to `_start`.

```
_start (…/arch/ppc/kernel/head.S)
       early_init (…/arch/ppc/kernel/setup.c)
start_here (…/arch/ppc/kernel/head.S)
       machine_init (…/arch/ppc/kernel/setup.c)
              platform_init (…/arch/ppc/platforms/gigateak.c)
start_kernel (…/init/main.c)
       setup_arch (…/arch/ppc/kernel/setup.c)
              gigateak_setup_arch (…/arch/ppc/platforms/gigateak.c)
                     gigateak_setup_bridge
                     gigateak_setup_peripherals
                     gigateak_setup_ethernet
                     gigateak_enable_ipmi
```

1. "gigateak" is the HW400c/2 platform.

2. U-boot jumps to address `_start`. Normally `_start` is at address 0. See `System.map`

3. The call to `gigateak_setup_arch()` is made via the function pointer `ppc_md.setup_arch()`. This function pointer is initialized in `platform_init()`.

4. `gigateak.c` is the extra file needed for Gentoo to boot on the HW400c/2

 Copyright 2006, SBE, Inc.

5.5.2 *Booting with tftp*

Tftp boot requires a tftp boot server and an NFS mounted file system. If a static IP address is not assigned to the HW400c/2 through the boot console, a bootp server may also be necessary. The bootp server, tftp server, and the NFS server functions may or may not be the same machine.

5.5.2.1 U-boot parameters for tftp with bootp

The following example shows U-boot parameters necessary for a tftp download and boot using a IP address obtained from a bootp server. The bootp server will assign an IP address, a gateway IP address, and a boot file image name from its `bootptab`. Assignments are based on the HW400c/2's MAC address. The IP addresses listed in the printenv dump (from non-volatile memory) are ignored. Here the unused IP addresses are set to 0.0.0.0 to avoid confusion and show that they are not in use.

```
# debug> printenv

   bootargs=console=ttyMM0,9600n8 ip=bootp nfsroot=/opt/gentoo \
               root=/dev/nfs rw
   bootcmd=bootp; bootm
   bootdelay=5
   baudrate=9600
   ethaddr=00:a0:d6:12:34:56
   ipaddr=0.0.0.0
   serverip=0.0.0.0
   gatewayip=0.0.0.0
   netmask=255.255.255.0
   stdin=serial
   stdout=serial
   stderr=serial
   ethact=mv_enet0

   Environment size: 288/4092 bytes
```

 Copyright 2006, SBE, Inc.

5.5.2.2 U-boot parameters for tftp with static IP address

The following example shows U-boot parameters necessary for a tftp download and boot with a static IP address assigned using the U-boot command:

```
# set ipaddr <ip address>
```

Using this method, the gateway IP address (`gatewayip`), the tftp server IP address (`serverip`), netmask (`netmask`), and boot file name (`bootfile`) must also be assigned using the u-boot command `set`. The IP address and Server IP address strings must then added to the `bootargs` line. When all variables are configured, use the `save` command to store the variables in non-volatile memory.

```
# debug> print
    bootargs=console=ttyMM0,9600n8 ip=$(ipaddr):$(serverip) \
                nfsroot=/opt/gentoo root=/dev/nfs rw
    bootfile=uImage
    bootcmd=tftpboot; bootm
    bootdelay=5
    baudrate=9600
    ethaddr=00:a0:d6:12:34:56
    ipaddr=10.0.0.10
    serverip=10.0.0.5
    gatewayip=10.0.0.2
    netmask=255.255.255.0
    stdin=serial
    stdout=serial
    stderr=serial
    ethact=mv_enet0

    Environment size: 320/4092 bytes
```

5.5.2.3 Boot console

During the boot process, a large number of messages appear on the console terminal (stdout). The following is a typical console boot screen:

```
# U-boot boot output to console
# HW400c/2

U-Boot 1.1.2 (Apr  4 2006 - 14:01:43)
SBE HW400c/2
Copyright 2006 SBE, Inc.

CPU:   MPC7447A v1.1 @ 999.999 MHz
BOARD: HW400c/2
DRAM:  Total SDRAM memory is 256 MB
pci status register = 02


Copyright 2006 SBE, Inc.

ETH0: 00:a0:d6:12:34:563
IP: 10.0.0.10
BOOTARGS: console=ttyMM0,9600n8 ip=bootp nfsroot=/opt/gentoo root=/dev/nfs rw

Hit any key to stop autoboot:  0
Using mv_enet0 device
```

```
TFTP from server 10.0.0.5; our IP address is 10.0.0.10
Filename 'uImage'.
Load address: 0x400000
Loading: #################################################
         #################################################
         #################################################
         #################################################
         ################################
done
Bytes transferred = 1551015 (17aaa7 hex)
## Booting image at 00400000 ...
   Image Name:   Linux-2.6.9
   Image Type:   PowerPC Linux Kernel Image (gzip compressed)
   Data Size:    1550951 Bytes =  1.5 MB
   Load Address: 00000000
   Entry Point:  00000000
   Verifying Checksum ... OK
   Uncompressing Kernel Image ... OK
## Transferring control to Linux (at address 00000000) ...

setup_arch: enter
setup_arch: bootmem
gigateak_setup_arch: enter
gigateak_setup_arch: calling setup_bridge
IGNP jumper is installed
Host PCI is not present
mv64x60 initialization
mv64x60 initialization done
gigateak_setup_peripherals: enter
gigateak_intr_setup: enter
gigateak_intr_setup: exit
gigateak_setup_peripherals: exit
In gigateak_setup_ethernet
gigateak_setup_arch: exit
arch: exit
mv64460_init_irq: enter
mv64460_init_irq: exit

Total memory = 256MB; using 512kB for hash table (at 80400000)
Linux version 2.6.9 (root@localhost) (gcc version 3.4.4 (Gentoo 3.4.4- r1,
       ssp-3.4.4-1.0, pie-8.7.8)) #2 Wed Apr 12 13:16:54 6PCI#1: first=0 last=0
SBE Gigateak HW400c/2 port
Built 1 zonelists
Kernel command line: console=ttyMM0,9600n9 ip=bootp nfsroot=/opt/gentoo
       root=/dev/nfs rw
PID hash table entries: 2048 (order: 11, 32768 bytes)
time_init: decrementer frequency = 41.666666 MHz
Console: colour dummy device 80x25
Dentry cache hash table entries: 65536 (order: 6, 262144 bytes)
Inode-cache hash table entries: 32768 (order: 5, 131072 bytes)
Memory: 255104k available (2388k kernel code, 1212k data, 128k init, 0k
         highmem)
Mount-cache hash table entries: 512 (order: 0, 4096 bytes)
NET: Registered protocol family 16
PCI: Probing PCI hardware
gigateak_map_irq 14F1:8474 slot=1 pin=1 irq=81
gigateak_map_irq 14F1:8474 slot=1 pin=2 irq=82
SCSI subsystem initialized
Installing knfsd (copyright (C) 1996 okir@monad.swb.de).
Initializing Cryptographic API
MV64x60 watchdog driver
ipmi message handler version v33
ipmi device interface version v33
IPMI System Interface driver version v33, KCS version v33, SMIC version v33,
         BT version v33
ipmi_si: Trying "kcs" at I/O port 0xca2
ipmi_si: Trying "smic" at I/O port 0xca9
ipmi_si: Trying "bt" at I/O port 0xe4
ipmi_si: Unable to find any System Interface(s)
IPMI Watchdog: driver version v33
Copyright (C) 2004 MontaVista Software - IPMI Powerdown via sys_reboot version
        v33.
Serial: MPSC driver $Revision: 1.00 $
ttyMM0 at MMIO 0xf1008000 (irq = 36) is a MPSC
ttyMM1 at MMIO 0xf1009000 (irq = 38) is a MPSC
RAMDISK driver initialized: 16 RAM disks of 4096K size 1024 blocksize
loop: loaded (max 8 devices)
MV-643xx 10/100/1000 Ethernet Driver
eth0: port 0 with MAC address 00:a0:d6:62:39:03
eth0: RX NAPI Enabled
```

```
HDLC support module revision 1.17
Cronyx Ltd, Synchronous PPP and CISCO HDLC (c) 1994
Linux port (c) 1998 Building Number Three Ltd & Jan "Yenya" Kasprzak.
Loading Adaptec I2O RAID: Version 2.4 Build 5go
Detecting Adaptec I2O RAID controllers...
megaraid cmm: 2.20.2.0 (Release Date: Thu Aug 19 09:58:33 EDT 2004)
megaraid: 2.20.4.0 (Release Date: Mon Sep 27 22:15:07 EDT 2004)
mice: PS/2 mouse device common for all mice
i2c /dev entries driver
NET: Registered protocol family 2
IP: routing cache hash table of 2048 buckets, 16Kbytes
TCP: Hash tables configured (established 16384 bind 32768)
ip_conntrack version 2.1 (2048 buckets, 16384 max) - 336 bytes per conntrack
ip_tables: (C) 2000-2002 Netfilter core team
ipt_recent v0.3.1: Stephen Frost <sfrost@snowman.net>.
         http://snowman.net/projects/ipt_recent/
arp_tables: (C) 2002 David S. Miller
NET: Registered protocol family 1
NET: Registered protocol family 17
Sending BOOTP requests . OK
IP-Config: Got BOOTP answer from 10.0.0.5, my address is 10.0.0.10
IP-Config: Complete:
      device=eth0, addr=10.0.0.10, mask=255.255.255.0, gw=10.0.0.2,
     host=10.0.0.10, domain=, nis-domain=(none),
     bootserver=10.0.0.5, rootserver=10.0.0.5, rootpath=
Looking up port of RPC 100003/2 on 10.0.0.5
Looking up port of RPC 100005/1 on 10.0.0.5
VFS: Mounted root (nfs filesystem).
Freeing unused kernel memory: 128k init
INIT: version 2.86 booting

Gentoo Linux; http://www.gentoo.org/
 Copyright 1999-2005 Gentoo Foundation; Distributed under the GPLv2

 * Mounting proc at /proc ...                                          [ ok ]
 * Mounting sysfs at /sys ...                                          [ ok ]
 * Mounting /dev for udev ...                                          [ ok ]
 * Populating /dev with saved device nodes ...                         [ ok ]
 * Seeding /dev with needed nodes ...                                  [ ok ]
 * Setting up proper hotplug agent ...
 * Setting /sbin/udevsend as hotplug agent ...                         [ ok ]
 * Starting udevd ...                                                  [ ok ]
 * Populating /dev with existing devices with udevstart ...            [ ok ]
 * Letting udev process events ...                                     [ ok ]
 * Finalizing udev configuration ...                                   [ ok ]
 * Mounting devpts at /dev/pts ...                                     [ ok ]
 * Activating (possible) swap ...                                      [ ok ]
 * Remounting root filesystem read/write ...                           [ ok ]
 * Setting hostname to localhost ...                                   [ ok ]
 * Calculating module dependencies ...                                 [ ok ]
 * Checking all filesystems ...                                        [ ok ]
 * Mounting local filesystems ...                                      [ ok ]
 * Activating (possibly) more swap ...swapon: /dev/sda2: No such device or
        address                 [ !! ]
 * Setting system clock using the hardware clock [UTC] ...             [ ok ]
 * Configuring kernel parameters ...                                   [ ok ]
 * Updating environment ...                                            [ ok ]
 * Cleaning /var/lock, /var/run ...                                    [ ok ]
 * Cleaning /tmp directory ...                                         [ ok ]
 * Caching service dependencies ...                                    [ ok ]
 * Caching service dependencies ...                                    [ ok ]
 * Caching service dependencies ...                                    [ ok ]
 * Loading key mappings ...                                            [ ok ]
 * Setting terminal encoding to UTF-8 ...                              [ ok ]
 * net.eth0: cannot start until the runlevel boot has completed
 * Starting lo
 *   Bringing up lo ...                                                [ ok ]
 * Initializing random number generator ...                            [ ok ]
INIT: Entering runlevel: 3
 * Caching service dependencies ...                                    [ ok ]
 * Starting eth0                                                       [ ok ]
 *   Keeping current configuration for eth0                            [ ok ]
                                                                       [ ok ]
 * Setting system clock ...Sat Jan  1 01:01:00 PST 2005                [ ok ]
 * Starting sshd ...                                                   [ ok ]
                                                                       [ ok ]
 * Starting local ...                                                  [ ok ]

This is localhost.(none) (Linux ppc 2.6.9) 11:09:54
localhost login:
```

5.5.3 *Booting with Disk on Chip*

A Disk-on-Chip (DoC) flash file system device is used on the HW400c/2 for data storage. DoC is a high-density flash device manufactured by M-Systems Incorporated, and has a data bus width of 16 bits. The 128 MB device is standard on the HW400c/2, with the option of populating other devices for OEM configurations.

Burst reads/writes to the DoC are not possible due to the maximum input clock frequency of the device (33 MHz) being slower than the 100 MHz device bus clock.

The Disk-on-Chip may also be used for storing a Linux kernel, which in turn can be used for booting, making the HW400c/2 a true stand-alone blade. Limitations to the kernel size are in direct proportion to the size of the RAM.

5.5.3.1 Loading the Disk on Chip

Loading the DoC requires that the HW400c/2 is booted. You may do this with the standard tftp image. See Section 5.5.2
Loading the DoC with necessary images requires the following files, all must be located in the same directory.

A. *docshell* A binary DoC configuration utility from M-Systems

B. *fmt* A script that invokes *docshell* to do the low-level formatting of the disk-on-chip and to create two binary partitions.

C. *wr0* A script that invokes *docshell* to write *uImage* (kernel image) to binary partition 0.

D. *wr1* A script that invokes *docshell* to write *uRamdisk* to binary partition 1.

E. *uImage* The kernel image.

F. *uRamdisk* The ramdisk image.

The sequence of commands to load the DoC (where # is the prompt) is as follows:

```
# ./fmt
# ./wr0
# ./wr1
```

 Copyright 2006, SBE, Inc.

5.5.3.2 Creating a uRamdisk Image

uRamdisk is a tiny kernel image needed to boot `uImage` from the Disk on Chip. uRamdisk has the same intent as a ramdisk on other linux platforms. It brings up necessary drivers needed to access the real kernel image (`uImage`). After booting the HW400c/2, the following commands will create uRamdisk.

```
# dd if=/dev/zero of=ramdisk.image bs=1024 count=32768

# /sbin/mkfs.ext2 ramdisk.image

# mkdir -p /mnt/ramdisk

# mount -o loop ramdisk.image /mnt/ramdisk
```

Copy everything that is needed in the ramdisk to /mnt/ramdisk. Then...

```
# umount /mnt/ramdisk

# gzip ramdisk.image

# mkimage -T ramdisk -C gzip -d ramdisk.image.gz uRamdisk
```

uRamdisk can be written to disk-on-chip with the *docshell* utility.

5.5.3.3 Booting from DoC

In U-boot, the *bootargs* variable should be set as follows:

```
# set bootargs ip=bootp root=/dev/ram0 rw console=ttyMM0,9600n8
  ramdisk_size=65536

# saveenv        # Save the U-Boot variables to NVRAM
```

Then boot from disk-on-chip as follows:

```
# docload

# bootm 400000 800000
```

Alternately, reset the card and let auto boot run.

 Copyright 2006, SBE, Inc.

5.6 Compiling the Kernel (*uImage*)

Unlike other some other Linux distributions, the Gentoo kernel can be natively compiled on the HW400c/2 following standard Linux kernel build procedures. Rebuilding the kernel is necessary when changing the kernel configuration parameters.
These are the basic steps necessary to compile the kernel natively on the HW400c/2;

1. As root, change to the kernel source directory

   ```
   # cd /usr/src/linux-2.6.9-gigateak
   ```

2. Set the date (see man `date`) MMDDHHmmYYYY
   Where MM = 2 digit month
   DD = 2 digit day
   HH = 2 digit hour
   mm = 2 digit minutes
   YYYY = 4 digit year

   ```
   # date 031310002006
   ```

3. Clean up old `.config` files

   ```
   # make mrproper
   ```

4. Create a new `.config` file by copying the `config-save` file to `.config`

   # cp config-save .config

5. Create the changes in the `.config` file

   # make oldconfig

6. Compile the kernel

   ```
   # make
   ```

7. Create the kernel binary (uImage)

   ```
   # make uImage
   ```

8. On the ***host*** machine, copy `uImage` to `/tftpboot`

   ```
   # cp uImage /tftpboot/.
   ```

ASCII terminals, such as Minicom and Hyperterminal, may not run menu driven kernel configuration utilities such as `menuconfig` properly from the HW400c/2 console. There two options here, `ssh` to the HW400c/2 from the host and use `menuconfig` from the host path: `/opt/gentoo/usr/src/linux,` then finish the compile from the HW400c/2, or on the HW400c/2, use the `config` utility (`make config`), which will step through each option individually.

 Copyright 2006, SBE, Inc.

5.6.1 *Gentoo Application Packages Management*

"Portage" is the name of Gentoo's package management system. All Gentoo packages can be found under `/usr/portage`. If a package is needed, for example, firewall or ftp services, it can be found in the portage directory. Some of the package names are a bit obscure (for example, `ssh` is found under `net-misc`, while `xinetd` is found under `sys-apps`), so some research may be necessary to locate the needed package.

`xinetd` is *not* automatically installed and activated under Gentoo as under some Linux distributions (e.g.Redhat, Suse). Use the `emerge` function to install these packages to gain network access.

To query the running status of services, from the HW400c/2 console use the command:

```
# rc-status --all
```

For more information about Portage see the man page `portage(5)`, and www.gentoo.org.

There are several HOW-TO's for various applications and services located at http://gentoo-wiki.com/Index:HOWTO

5.6.1.1 Emerge

Emerge is the command-line interface to the Portage system run natively on the HW400c/2. Emerge is primarily used for installing packages, and can automatically handle any dependencies that the desired package has. Emerge can also update the portage tree, making new and updated packages available. Emerge gracefully handles updating installed packages to newer releases as well. It handles both source and binary packages, and it can be used to create binary packages for distribution. It is similar in function to `yum` and BSD `ports`.

`Emerge` is not a root-user only program. You will only need root's permissions to install, uninstall, and sync. Normal users can use commands to query what's installed, settings, etc. However, with this in mind, there are packages that should only be installed as root.

For more information see the man page `emerge(1)`.

 Copyright 2006, SBE, Inc.

5.6.1.2 Enable remote login with `ssh`

Gentoo Linux installs `sshd` by default, but it is not enabled. Before starting up an ssh server look through the configuration file at `/etc/ssh/sshd_config`. One thing that you should consider setting is `PermitRootLogin no`. This disables logins as root, which means that in order to log in, an attacker first must login as a regular user (in the wheel group) and then `su`. This would require knowing two passwords as well as a username with `su` access making brute force attacks nearly impossible. To start sshd on the HW400c/2 console as root:

```
# /etc/init.d/sshd start
```

If you want to add `sshd` as a default daemon on every start up:

```
# rc-update add sshd default
```

5.6.1.3 Starting network services; `xinetd`

A lot of services depend on having the `xinetd` service running. Unlike `sshd`, Gentoo Linux does not install `xinetd` by default. Use the `emerge` utility to install `xinetd` and its dependencies from the HW400c/2 console as root:

```
# emerge xinetd
```

Wait for the console messages to stop and return to a prompt.

To start xinetd on the HW400c/2 console:

```
# /etc/init.d/xinetd start
```

If you want to add `xinetd` as a default daemon on every start up:

```
# rc-update add xinetd default
```

5.6.1.4 Starting `ftp` services; `vsftpd`

For ftp, Gnetoo Linux uses the standard Linux ftp daemon, `vsftpd`. Use the `emerge` utility to load the `vsftpd` daemon package. As root from the HW400c/2 console:

```
 # emerge vsftpd
```

Wait for the console messages to stop and return to a prompt.

To start vsftp on the HW400c/2 console:

```
# /etc/init.d/vsftpd start
```

If you want to add `xinetd` as a default daemon on every start up:

 Copyright 2006, SBE, Inc.

```
# rc-update add vsftpd default
```

You may also want to modify your `/etc/vsftpd/vsftpd.conf` file configuration and security parameters.
Some of the basic parameters in `/etc/vsftpd/vsftpd.conf` can be:

```
dirmessage_enable=YES
# banner_file=/etc/vsftpd/vsftpd.banner # edit banner first
chown_uploads=NO
xferlog_enable=YES
idle_session_timeout=600
data_connection_timeout=120
ascii_upload_enable=NO
ascii_download_enable=NO
chroot_list_enable=YES
background=YES
listen=YES
ls_recurse_enable=NO
```

More information on ftp can be found at: http://gentoo-wiki.com/HOWTO_vsftpd

5.7 Linux Device Drivers

SBE supplies Linux device drivers with each of its adapter cards. Installation of a Linux device driver will be detailed in the manuals for those products.

The HW400c/2 local PCI bus I/O voltage is **3.3 volts only.** Therefore, **PTMC and PMC modules with 5 volt only I/O signals cannot be used** on the HW400c/2 board, and are prevented from being installed by a voltage key residing at each site.

 Copyright 2006, SBE, Inc.

Appendix A **IPMI GetDeviceID**

Response message data to IPMI *GetDeviceID* request. Values in **bold** are changes from default Zircon firmware response message.

Byte offset	Description	IPMI Definition	SBE value	Comments
1	Completion code	(returned in message, not part of data)	N/A	
2	Device ID	00=unspecified	0	Implements standard IPMI commands; see product ID bytes to uniquely determine product.
3	Device Revision	[7]: SDR [6-4]: Rsvd, must be 0 [3:0]: device revision, binary encoded	0 (no SDRs available)	[3-0] can be incremented if hardware changes.
4	Firmware Revision 1	[7] 0=normal; 1=firmware/SDR update in progress [6-0] Major firmware rev, binary encoded	0x82 (Zircon default)	HW400c/2 uses Zircon default value
5	Firmware Revision 2	Minor Firmware revision, BCD encoded	**0x04** (Zircon default is 0x03, e.g. 0.3)	Indicates Zircon stock firmware modification level (not processor boot ROM).
6	IPMI version	BCD encoded	0x01 (Zircon default)	HW400c/2 uses Zircon default value, (e.g. IPMI 1.0).
7	Additional Device support	Each bit indicates additional capabilities beyond 'normal' IPMI.	0x29 (Zircon default)	HW400c/2 uses Zircon default value meaning event generator, FRU inventory, and SDR repository.
8	Manufacturer ID, LSB	IANA number	**0x1F** (Zircon default is 0)	SBE IANA number, LSB
9	Manufacturer ID	IANA number	**0x04** (Zircon default is 0)	SBE IANA number, MSB.
10	Manufacturer ID, MSB	IANA number	**0x00** (Zircon default is 0)	SBE IANA number is only two bytes
11	Product ID, LSB	Manufacturer-specific: 0x0000=unspecified, 0xffff=reserved	**0x75** (Zircon default is 0)	PLD Board Option Register (BOR) value (legacy HW400c/R with IPMI and PSB).
12	Product ID, MSB	Manufacturer specific	**0x03** (Zircon default is 0)	PLD Port Option Register (POR) value; e.g. 8 ports (legacy HW400c/R with IPMI and PSB).
13	Auxiliary Firmware Revision Info 1	Manufacturer specific	**0x46** (Zircon default is N/A)	[7-4] VxWorks boot ROM version number BCD (e.g. 4) [3-0] VxWorks boot ROM version number BCD (e.g. 6) (legacy HW400c/R with IPMI and PSB).
14	Auxiliary Firmware Revision Info 2	Manufacturer specific	**0x1E** (Zircon default is N/A)	[7-5] reserved, zero [4-0] day of boot ROM release, binary (1-31) (e.g. 30) (legacy HW400c/R with IPMI and PSB).
15	Auxiliary Firmware Revision Info 3	Manufacturer specific	**0x57** (Zircon default is N/A)	[7-4] month of boot ROM release, binary (1-12) (e.g. 5) [3-0] MS 4 bits of year, binary (e.g. 2004 = 0x7D4) (legacy HW400c/R with IPMI and PSB).
16	Auxiliary Firmware Revision Info 4	Manufacturer specific	**0xD4** (Zircon default is N/A)	LS 8 bits of year, binary (e.g. 2004 = 0x7D4) (legacy HW400c/R with IPMI and PSB).

 Copyright 2006, SBE, Inc.

Appendix B U-Boot Environment variables

Das U-boot was created by Wolfgang Denk as an open source boot and debug firmware. A complete U-boot manual can be found at http://www.denx.de/wiki/bin/view/DULG/Manual. This appendix is a brief list of known U-boot environment variables accessed by entering the command `help` or `?` at the debug prompt.

Note: Some commands may not work on the SBE HW400c/2.

```
?       - alias for 'help'
askenv  - get environment variables from stdin
autoscr - run script from memory
base    - print or set address offset
bdinfo  - print Board Info structure
boot    - boot default, i.e., run 'bootcmd'
bootd   - boot default, i.e., run 'bootcmd'
bootm   - boot application image from memory
bootp   - boot image via network using BootP/TFTP protocol
cmp     - memory compare
coninfo - print console devices and information
cp      - memory copy
cpld    - Microwire EEPROM Access Subsystem
crc32   - checksum calculation
dcache  - enable or disable data cache
docload - load boot image from disk-on-chip
echo    - echo args to console
eeprom  - EEPROM sub-system
erase   - erase FLASH memory
flinfo  - print FLASH memory information
fsinfo  - print information about filesystems
fsload  - load binary file from a filesystem image
go      - start application at address 'addr'
help    - print online help
icache  - enable or disable instruction cache
icrc32  - checksum calculation
iloop   - infinite loop on address range
imd     - i2c memory display
iminfo  - print header information for application image
imls    - list all images found in flash
imm     - i2c memory modify (auto-incrementing)
imw     - memory write (fill)
inm     - memory modify (constant address)
iprobe  - probe to discover valid I2C chip addresses
itest   - return true/false on integer compare
loadb   - load binary file over serial line (kermit mode)
loads   - load S-Record file over serial line
loop    - infinite loop on address range
ls      - list files in a directory (default /)
md      - memory display
mm      - memory modify (auto-incrementing)
```

 Copyright 2006, SBE, Inc.

```
mtest      - simple RAM test
mw         - memory write (fill)
nfs        - boot image via network using NFS protocol
nm         - memory modify (constant address)
pci        - list and access PCI Configuraton Space
ping       - send ICMP ECHO_REQUEST to network host
printenv   - print environment variables
protect    - enable or disable FLASH write protection
rarpboot   - boot image via network using RARP/TFTP protocol
reset      - Perform RESET of the CPU
run        - run commands in an environment variable
saveenv    - save environment variables to persistent storage
setenv     - set environment variables
sleep      - delay execution for some time
tftpboot   - boot image via network using TFTP protocol
version    - print monitor version
```

 Copyright 2006, SBE, Inc.